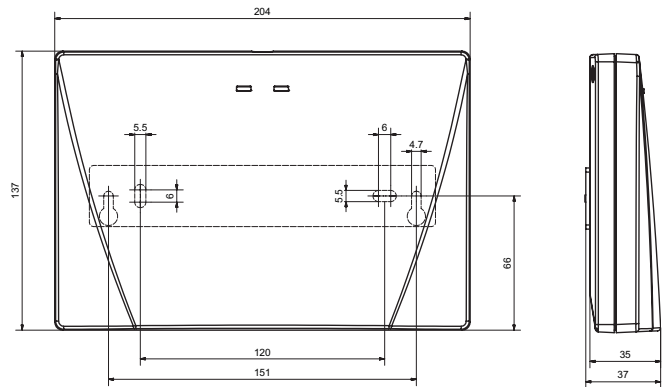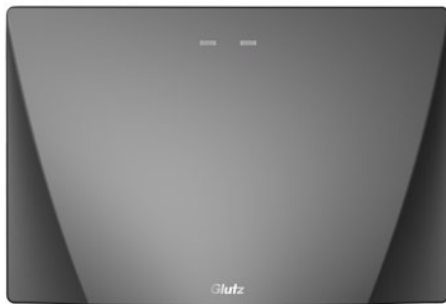Access Since 1863

82800 NET Gateway
for indoor applications

$C\,E$

Product profile

NET Gateway for indoor applications, wireless range extension with integrated antennas.

A operational TCP/IP network is required for operation; this network must be appropriately configured for building-wide functions. No network skills are required for the wireless network.

Standard version

- Ethernet interface (RJ-45) / TCP/IP / RS485 Bus
- PoE (Power over Ethernet) IEEE-802.3af, max. 15,4 W
- Mains operation (12 - 24 V DC), Current consumption: 250 mA at 12 V / 200 mA at 24 V, 1,5 W in standby
- Dimensions (WxHxD): 204 x 137 x 35 mm

Scope of supply

- NET gateway
- Mount for wall fastening, fixing screws and anchors
- Instruction manual

82800 · ① **·** ② **·** ③ **·** ④

① Power supply	② Housing	③ Antennas	④ Mounting
44 PoE, ethernet	**30** Black	**02 2 antennas**	**01 Wall mounting**
	31 White		
	32 Grey RAL7035		