

12511 FB PB

Catch lock with latch blocking, panic B



Product profile

For leaf connecting or corridor doors. In daytime and night-time operation, the external lever handle can be coupled or decoupled via the cylinder by turning a key. Exiting from the panic side is possible at all times using the panic function. For use in commercial buildings (administrative buildings, nursing homes) or for doors with amok prevention requirements such as schools, municipal administrations, social welfare offices.

- Key-operated latch mortice lock with latch blocking and panic B function
- Can be switched between daytime and night-time operation by turning a key
- Quiet closing due to the comfort latch and dampened deadbolt and latch throw
- Reversible due to the reversible DIN L/R latch
- Lever handle bearing with no backlash due to the two-part split clamp follower
- Linear lever handle operation and holding up torque
- Centred lock case
- Panic function reversible inwards/outwards
- Follower turning angle 32°



Important note

Suitable for rotary knob and free-wheel cylinders

Reducing bushes must not be used for the lock follower/spindle

Only use the 5920/59105 HESO panic-spindle.

Mount lever handles rotatably-fixed on plates/rosettes (easyfix®)!


12511 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Cutout	2 Distance	3 Backset	4 Follower	5 Forend	6 Direction	7 Surface	8 Options
CH	02 RZ	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (0)	00 Stainless steel matt	0000 No options
	03 PZ		70 70 mm		11 20r x 230 mm	1 DIN R (0)	99 On request	
			80 80 mm		12 22e x 248 mm*	3 DIN L I		
					18 20e x 230 mm*	4 DIN R I		
DIN	02 RZ	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (0)	00 Stainless steel matt	0000 No options
	03 PZ	74 74 mm	60 60 mm		16 20r x 235 mm*	1 DIN R (0)	99 On request	
			65 65 mm		17 24r x 235 mm	3 DIN L I		
			80 80 mm		99 On request	4 DIN R I		

* non-centred forend

12511 FB PB

Catch lock with latch blocking, panic B

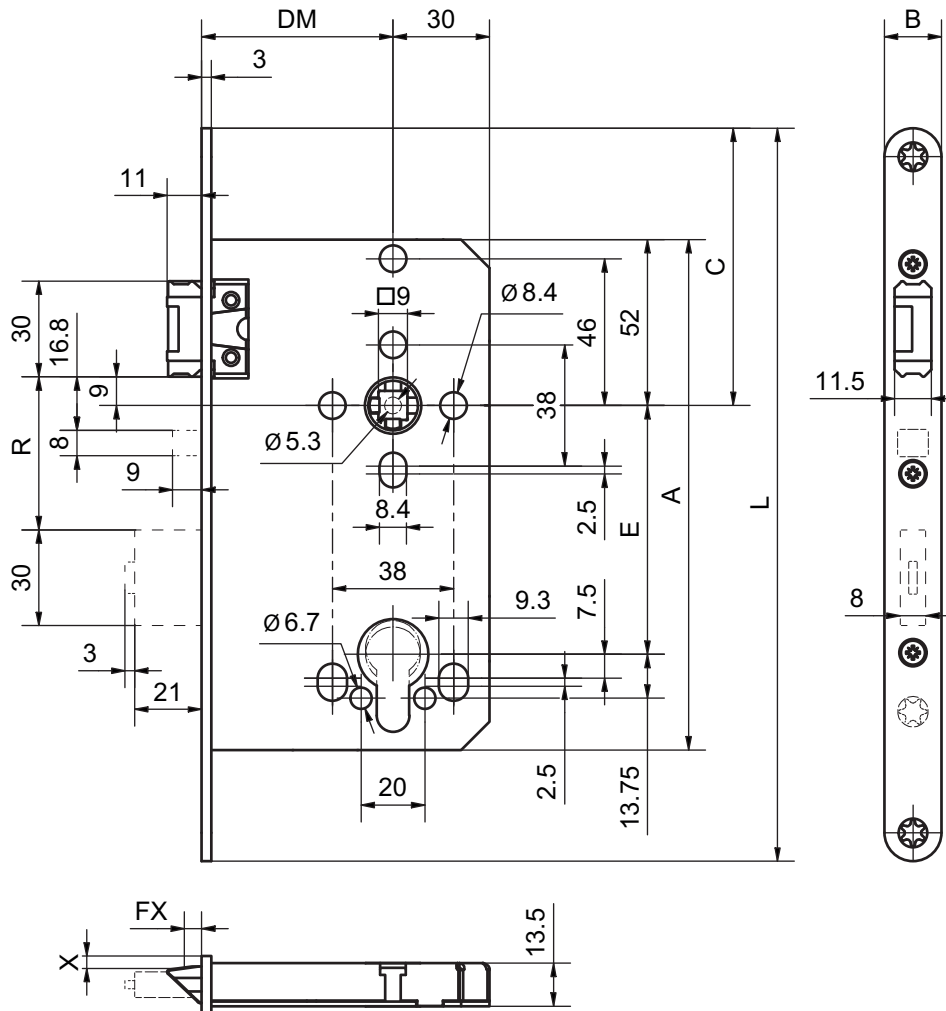

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

*nicht mittiger Stulp

E	DM	R	A	C	B	L
PZ72/RZ74	55/60/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5 118.5	18 20	250 300

**12400/12410

12XXX
Massbild