

## 12302 PE double-leaf

Mortice lock, panic E, double leaf



### Product profile

For double-leaf full panic doors operated from the outside with a pull handle or knob. Opening is only possible by latch withdrawal using the key. Exiting from the panic side is possible at all times using the panic function.

For use in commercial buildings e.g. conference rooms and store rooms.

- Manually locking 2-leaf mortise lock with panic E function
- Only in combination with the full-leaf strike box 12100
- Centred lock case with single-throw 20 mm deadbolt ejector
- Operation from the outside via the cylinder (latch withdrawal) or in conjunction with E fitting via an identification system
- Quiet closing of the door due to the comfort latch as well as cushioned bolt and latch throw
- Lever handle bearing with no backlash due to the two-part continuous clamp follower
- Linear lever handle operation and holding up torque due to the new spring design
- Reversible due to the reversible DIN L/R latch
- Follower turning angle 32°



### Important note

Thumbturn cylinders must not be used, with the exception of E-thumbturn cylinders with cam resetting.

When using a standard cylinder, the key must always be removed.

Reducing bushes must not be used for the lock follower/spindle.


### 12302 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Cutout	2 Distance	3 Backset	4 Follower	5 Forend	6 Direction	7 Surface	8 Options
CH	06 RZW	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (0)	00 Stainless steel matt	0000 No options
	07 PZW		70 70 mm		11 20r x 230 mm	1 DIN R (0)	99 On request	
			80 80 mm		99 On request			
DIN	06 RZW	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (0)	00 Stainless steel matt	0000 No options
	07 PZW	74 74 mm	60 60 mm		16 20r x 235 mm*	1 DIN R (0)	99 On request	
			65 65 mm		17 24r x 235 mm			
		80 80 mm		99 On request				

\* non-centred forend

## 12302 PE double-leaf

Mortice lock, panic E, double leaf

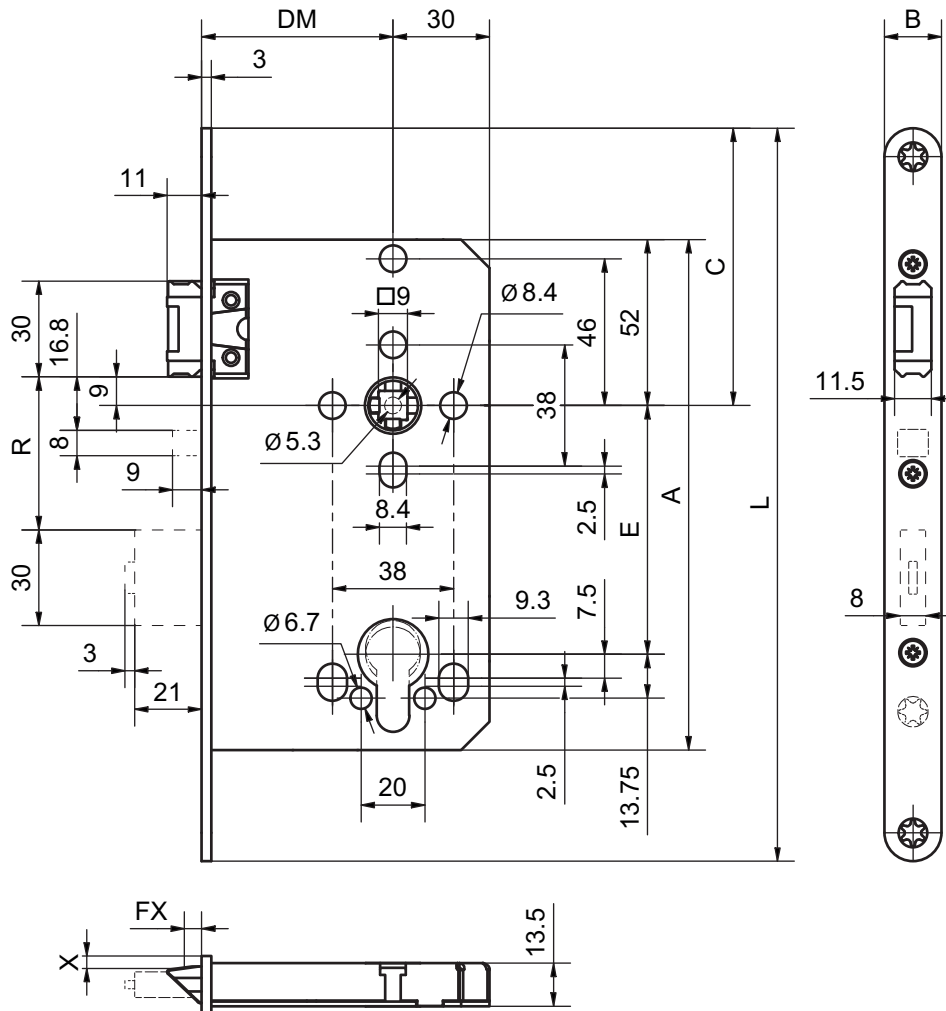

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

\*nicht mittiger Stulp

E	DM	R	A	C	B	L
PZ72/RZ74	55/60/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5 118.5	18 20	250 300

\*\*12400/12410

12XXX  
Massbild