

12312 PB double-leaf

Mortice lock, panic B, double leaf



Product profile

For double-leaf connecting or corridor doors, the external lever handle can be engaged or disengaged via the cylinder with a turn of the key in the opening direction up to the stop during day and night operation. Exit from the panic side is possible at any time using the panic function.

For use in commercial buildings (administrative buildings, nursing homes) or extension doors in schools and hotels

- Manually locking 2-leaf mortice lock with panic B function
- Only in combination with the full-leaf strike box 12100
- Centred lock case with single-throw 20 mm deadbolt ejector
- Can be switched between daytime and night-time operation by turning a key
- Quiet closing of the door due to the comfort latch as well as cushioned bolt and latch throw
- Lever handle bearing with no backlash due to the two-part continuous clamp follower
- Linear lever handle operation and holding up torque
- Reversible due to the reversible DIN L/R latch
- Panic function reversible inwards/outwards
- Follower turning angle 32°



Important note

Thumbturn cylinders must not be used, with the exception of E-thumbturn cylinders with cam resetting.

When using a standard cylinder, the key must always be removed.

Reducing bushes must not be used for the lock follower/spindle.


12312 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Cutout	2 Distance	3 Backset	4 Follower	5 Forend	6 Direction	7 Surface	8 Options
CH	02 RZ	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (0)	00 Stainless steel matt	0000 No options
	03 PZ		70 70 mm		11 20r x 230 mm	1 DIN R (0)	99 On request	
			80 80 mm		99 On request	3 DIN L I 4 DIN R I		
DIN	02 RZ	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (0)	00 Stainless steel matt	0000 No options
	03 PZ	74 74 mm	60 60 mm		16 20r x 235 mm*	1 DIN R (0)	99 On request	
			65 65 mm		17 24r x 235 mm	3 DIN L I 4 DIN R I		
		80 80 mm		99 On request				

* non-centred forend

12312 PB double-leaf

Mortice lock, panic B, double leaf

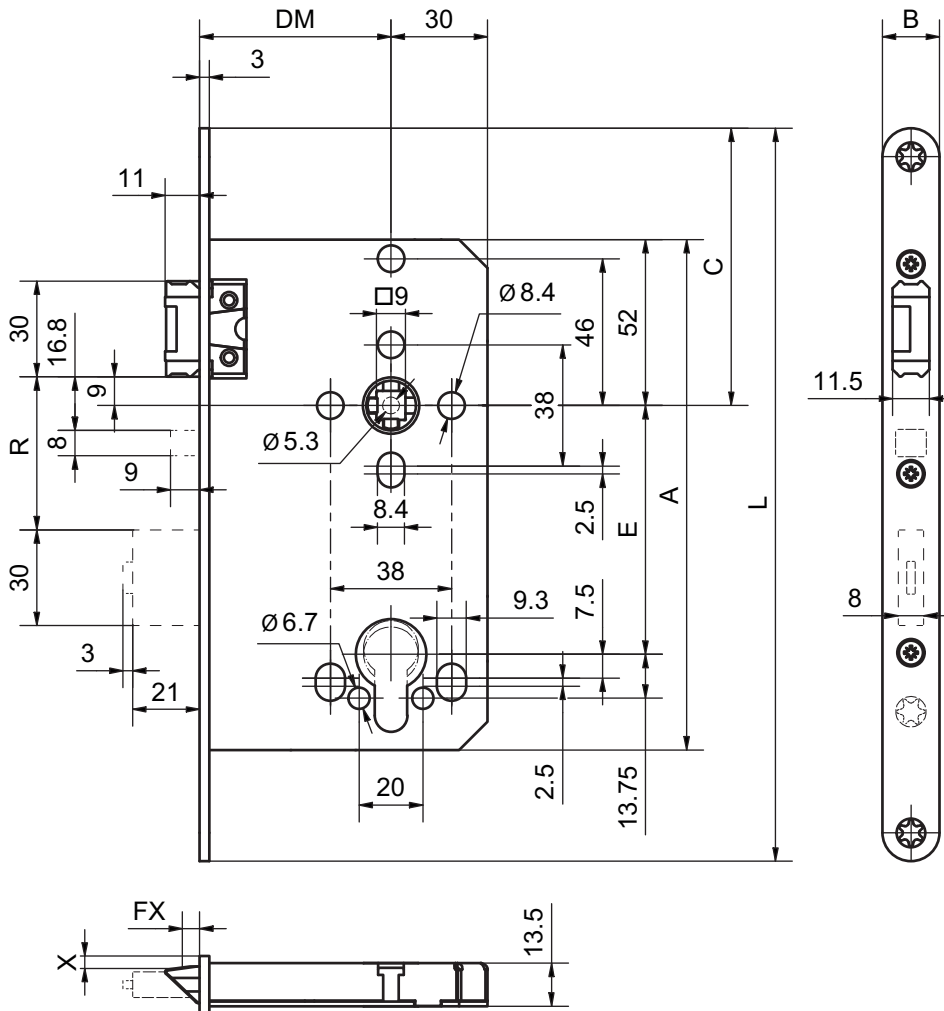

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

*nicht mittiger Stulp

E	DM	R	A	C	B	L
PZ72/RZ74	55/60/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5 118.5	18 20	250 300

**12400/12410

12XXX
Massbild