

12430 SV PC

Mortice lock, self-locking, panic C



Product profile

For external doors where unauthorised opening from the outside must be prevented. The outside lever handle is always in idle function. The key must be turned to the end stop in the opening direction, only then is the follower engaged and the door can be opened using the lever handle. After removing the key, the lever handle is switched back to idle. The panic function makes it possible to exit from the panic side at any time.

Used in commercial buildings (administration buildings) or secondary locking doors (e.g. server rooms).

- Self-locking lock with integrated sequence control and panic C function (closing force function)
- Centred lock case
- 20 mm deadbolt ejector
- Quiet closing due to the comfort latch and dampened deadbolt and latch throw
- Lever handle bearing with no backlash due to the two-part split clamp follower
- Linear lever handle operation and holding up torque
- Reversible due to the reversible DIN L/R latch
- Panic function reversible inwards/outwards
- Follower turning angle 32°



Important note

Suitable for rotary knob and free-wheel cylinders
 Reducing bushes must not be used for the lock follower/spindle
 External, mechanical bolt-switch contacts are not recommended
 Use only the 5920/59105 HESO panic square pin.
 The handles must be mounted rotatable-fixed on plates/roses (easyfix®).


12430 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Cutout	2 Centres	3 Backset	4 Follower	5 Forend	6 Direction	7 Surface	8 Options
CH	02 RZ	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (0)	00 Stainless steel matt	0000 No options
	03 PZ		70 70 mm		11 20r x 230 mm	1 DIN R (0)	99 On request	
			80 80 mm		12 22e x 248 mm*	3 DIN L I		
					18 20e x 230 mm*	4 DIN R I		
					19 18e x 230 mm			
					99 On request			
DIN	02 RZ	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (0)	00 Stainless steel matt	0000 No options
	03 PZ	74 74 mm	60 60 mm		16 20r x 235 mm*	1 DIN R (0)	99 On request	
			65 65 mm		17 24r x 235 mm	3 DIN L I		
					99 On request	4 DIN R I		

* non-centred forend

12430 SV PC

Mortice lock, self-locking, panic C

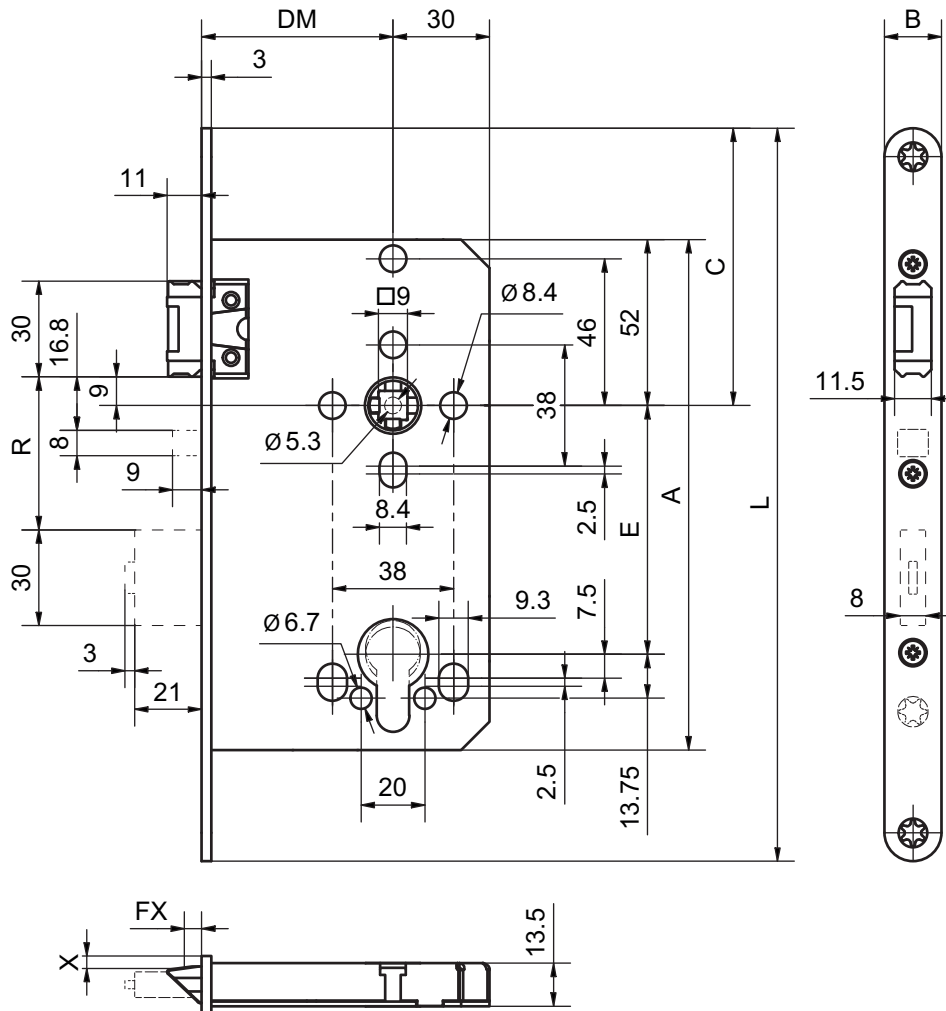

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

*nicht mittiger Stulp

E	DM	R	A	C	B	L
PZ72/RZ74	55/60/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5 118.5	18 20	250 300

**12400/12410

12XXX
Massbild