

56722

Panic push bar EN 1125




Product profile

For single and double-leaf doors
Suitable for timber and steel doors
Compliance with EN 1125
Can be used on panic doors
Suitable for fire doors


Standard version

One single version for the active and inactive leaf
Installation Height: of 99 mm
Compatible with rose screw fitting, 38 mm vertical screw hole spacing
Solid precision-cast stainless steel arm
Durable stainless steel substructure
Compatible with E-cylinders with turn Ø of up to 40 mm
For left and right hand use (symmetrical covers)
Without secondary movement
Suitable for M5 fixing screws
For locks with 9 mm square follower
Oval tube, 1150 mm long, for self-adjustment
Suitable for locks with 30° turn angle

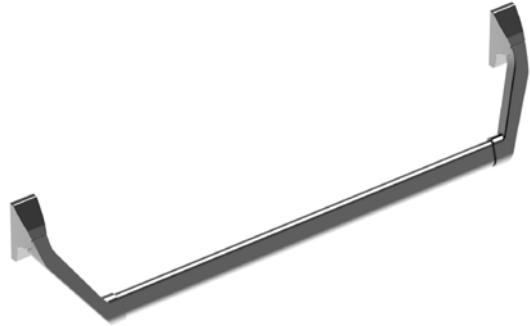

56722

Panic push bar EN 1125

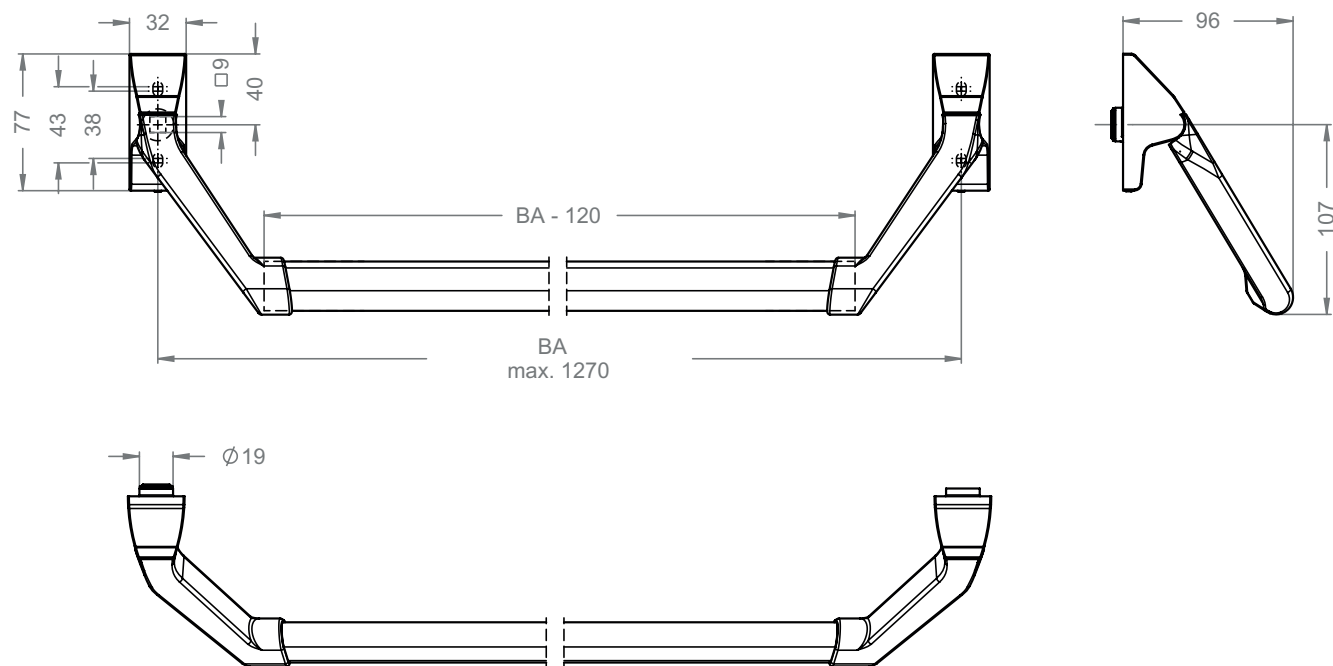

BA: fixing axes