

15131

Solid-leaf lock panic E double-leaf with top locking



Product profile


- For double-leaf timber and steel doors
- For high doors with additional top locking (recommended minimum height of 2200 mm)
- For emergency exit doors in accordance with EN 179
- For panic doors in accordance with EN 1125
- Suitable for fire doors
- For fittings with electronically actuated outside handle
- For doors with latch withdrawal fitting (knob handle)

Standard version

- Security bolt (single turn), 20 mm bolt throw
- With additional top locking
- Bolt with release lip for strike box
- Cylinder-independent (no freewheel or special functions necessary)
- Vertical rose screw fitting also possible
- Flush latch and deadbolt
- Emergency exit door lock with function E (latch withdrawal function)
- Follower turn angle of 30°
- Enclosed lock case
- Sleeved bolt through fixing holes
- Suitable for fire and smoke doors in accordance with DIN 4102 and EN 1634


Options

- Bolt monitoring (RU)
- Additional options available on request

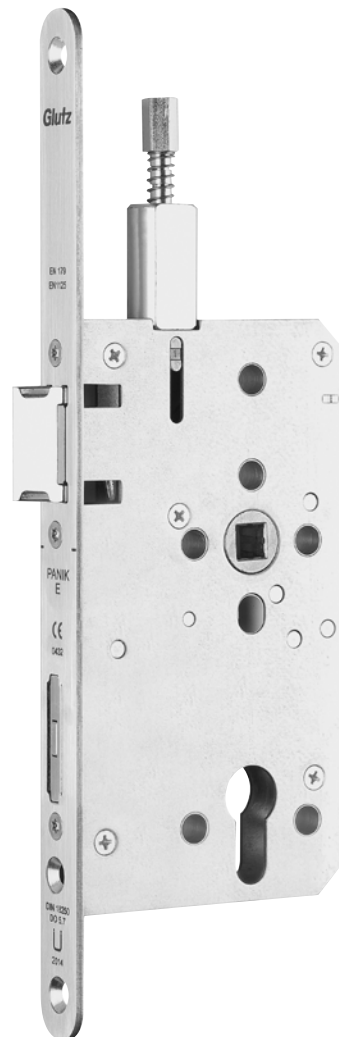

15131

Solid-leaf lock panic E double-leaf with top locking

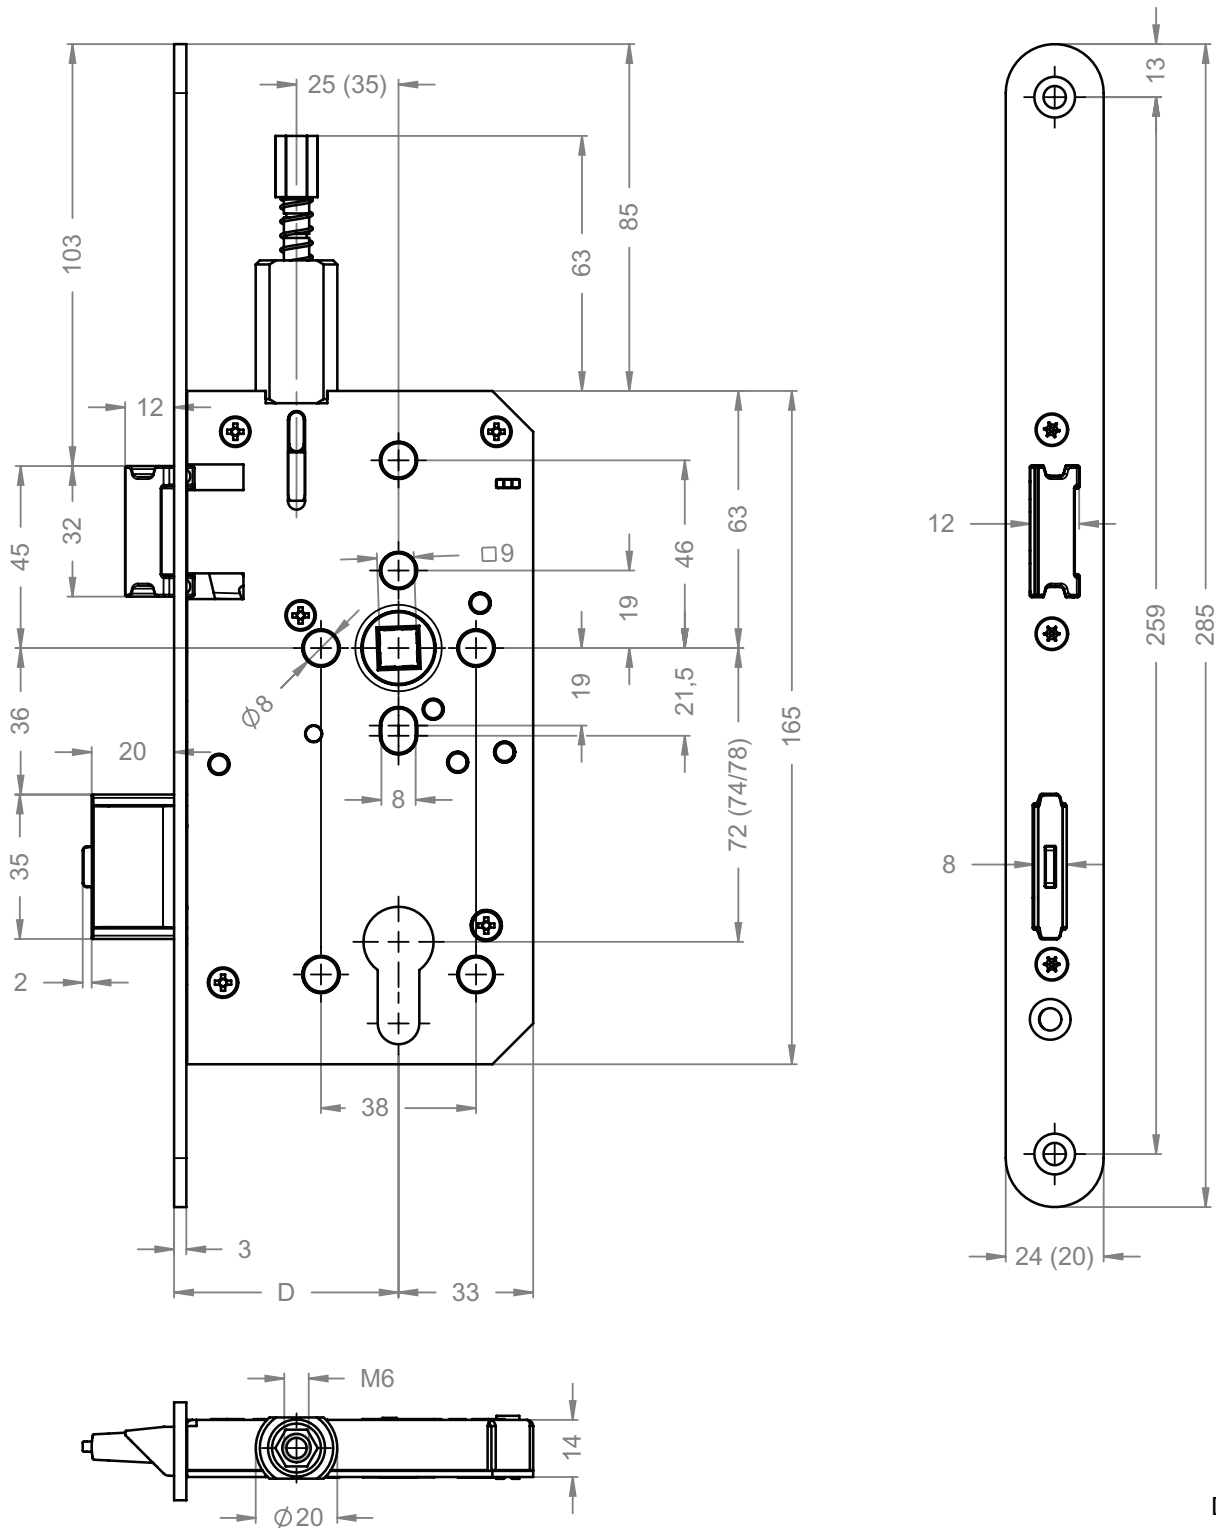

DIN L / G