


81003

Double cylinder RZ with contact pin

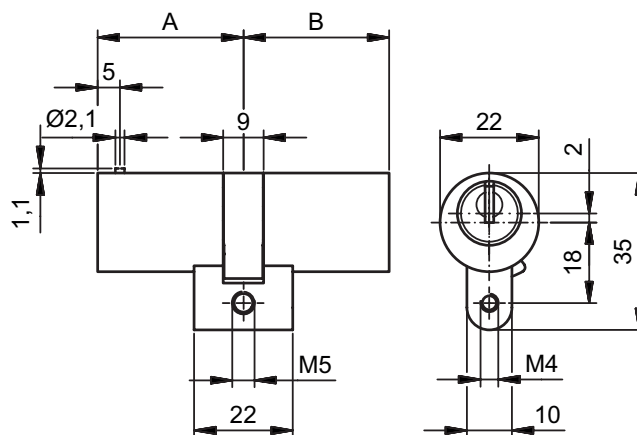

Product profile

Double cylinder with contact pin for lift doors.
The contact pin is pushed upwards when the key is inserted.

Standard version

Satin nickel plated brass

Scope of supply

- 1 Fixing screw 81540.75

Important note

Contact pin on side A

Drill protection class «D» according to EN 1303: 2015

81003 · ① · ② · ③ · ④ · ⑤ · ⑥

① Version	② Length A	③ Length B	④ Colour A ⑤ Colour B	⑥ Security
S Standard cam	32,5 mm	32,5 mm	0 Satin nickel plated	0 Standard
F Freewheeling cam	37,5 mm	37,5 mm	1 Polished nickel plated	1 Drill protection
M Cog wheel cam	42,5 mm	42,5 mm	2 Polished brass	
	47,5 mm	47,5 mm	3 Satin chrome plated	
	52,5 mm	52,5 mm	4 Polished chrome plated	
	57,5 mm	57,5 mm	5 Black	
	62,5 mm	62,5 mm	6 Antique	
	67,5 mm	67,5 mm	7 Bronzed	
	72,5 mm	72,5 mm	8 Chemically nickel plated	
	77,5 mm	77,5 mm		
	82,5 mm	82,5 mm		