


81051

Thumbturn cylinder RZ, asymmetric

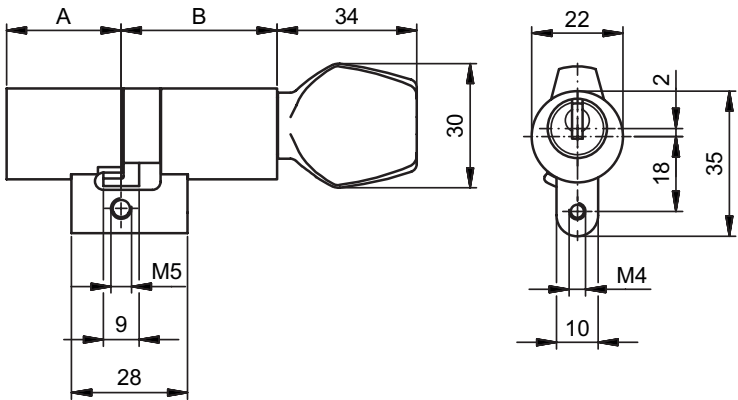

Product profile

for mortise locks and surface-mounted locks of all types, asymmetric

Standard version

Satin nickel plated brass

Scope of supply

- 1 Fixing screw 81540.75

Important note

Check compatibility with lock manufacturer

Drill protection class «D» according to EN 1303: 2015

81051 · 1 · 2 · 3 · 4 · 5 · 6 · 7

1 Version

2 Length A

3 Length B

4 Colour A

5 Colour B

6 Security

7 Thumbturn

S Standard cam

27,5 mm

27,5 mm

37,5 mm

37,5 mm

42,5 mm

42,5 mm

47,5 mm

47,5 mm

0 Satin nickel plated

1 Polished nickel plated

2 Polished brass

3 Satin chrome plated

4 Polished chrome plated

5 Black

6 Antique

7 Bronzed

8 Chemically nickel plated

0 Standard

1 Drill protection

0 Glutz design

1 Round