


81053

Thumbturn cylinder RZ with contact pin

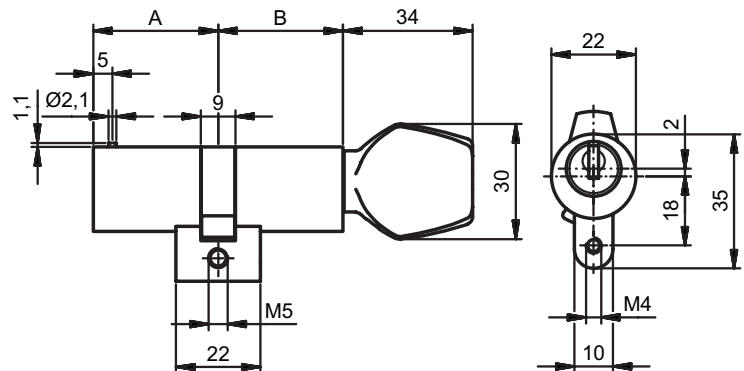

Product profile

Thumbturn cylinder with contact pin for lift doors. The contact pin is pushed upwards when the key is inserted.

Standard version

Satin nickel plated brass

Scope of supply

- 1 Fixing screw 81540.75

Important note

Contact pin on side A

Drill protection class «D» according to EN 1303: 2015

81053 · 1 · 2 · 3 · 4 · 5 · 6 · 7

1 Version	2 Length A	3 Length B	4 Colour A 5 Colour B	6 Security	7 Thumbturn
S Standard cam	32,5 mm	32,5 mm	0 Satin nickel plated	0 Standard	0 Glutz design
F Freewheeling cam	37,5 mm	37,5 mm	1 Polished nickel plated	1 Drill protection	1 Round
M Cog wheel cam	42,5 mm	42,5 mm	2 Polished brass		
	47,5 mm	47,5 mm	3 Satin chrome plated		
	52,5 mm	52,5 mm	4 Polished chrome plated		
	57,5 mm	57,5 mm	5 Black		
	62,5 mm	62,5 mm	6 Antique		
	67,5 mm	67,5 mm	7 Bronzed		
	72,5 mm	72,5 mm	8 Chemically nickel plated		
	77,5 mm	77,5 mm			
	82,5 mm	82,5 mm			