
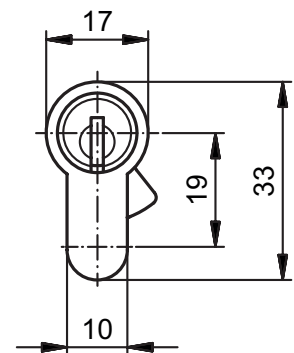


81102

Double cylinder PZ with priority function

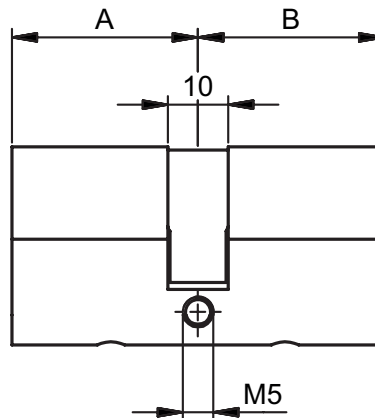

Product profile

This cylinder is equipped with a special coupling that assures the outside cylinder side and/or the the key inserted from the outside always has priority. For residential buildings, hospitals, retirement homes and senior residences.

Standard version

Satin nickel plated brass

Scope of supply

- 1 Fixing screw 81540.75

Important note

Priority function on side A

Drill protection class «D» according to EN 1303: 2015

81102 · ① · ② · ③ · ④ · ⑤ · ⑥

| ① Version | ② Length A | ③ Length B | ④ Colour A ⑤ Colour B | ⑥ Security |
|---------------------------|--------------|----------------|-----------------------------------|---------------------------|
| S Standard cam | 31 mm | 31,0 mm | 0 Satin nickel plated | 0 Standard |
| F Freewheeling cam | 36 mm | 36,0 mm | 1 Polished nickel plated | 1 Drill protection |
| M Cog wheel cam | 41 mm | 41,0 mm | 2 Polished brass | |
| | 46 mm | 46,0 mm | 3 Satin chrome plated | |
| | 51 mm | 51,0 mm | 4 Polished chrome plated | |
| | 56 mm | 56,0 mm | 5 Black | |
| | 61 mm | 61,0 mm | 6 Antique | |
| | 66 mm | 66,0 mm | 7 Bronzed | |
| | 71 mm | 71,0 mm | 8 Chemically nickel plated | |
| | 76 mm | 76,0 mm | | |
| | 81 mm | 81,0 mm | | |