


5090 Emerald Stainless steel lever handle

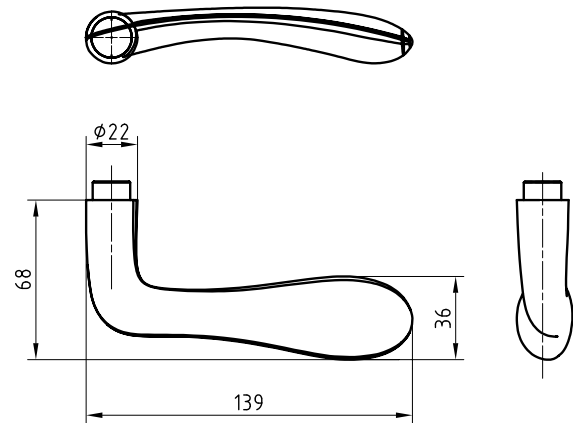

Picture shows handle with 5620C rose

Product profile

Commercial buildings, administrative centres and superior quality residential developments

Square spindle 8,5 mm or 9 mm
16 mm guide for Glutz twin glide
Category of use class 4, EN 1906: 2002-05

Standard version

Lever handle Length: 139 mm, Ø 22 mm
Projection: 68 mm
Square spindle 8 mm
Solid satin stainless steel
Handing to be specified
16 mm guide for Glutz glide / easyfix

Options

Polished stainless steel
RAL lacquered
PVD lacquered

5090 · ① · ② · ③ · ④ · ⑤ · ⑥

① 1021_Äusführung	② Guide	③ 1020_Vierkant	④ 1022_Stiftlänge	⑤ 1312_Material Vierkant	⑥ Surface
01 Lochteil links	0 glide	80 8 mm	00 00	0 ohne Vierkant	00 Stainless steel matt
02 Lochteil rechts	1 twin	85 8,5 mm	04 79 mm	1 Stahl verzinkt	11 Stainless steel polished
11 Stiftteil links		90 9 mm	10 104 mm	2 Edelstahl	44 Antibacterial
12 Stiftteil rechts			99 Auf Anfrage		51 RAL 9005 black matt
52 Paar Stiftteil links					99 On request
53 Paar Stiftteil rechts					