


## 80586 E Organisation Fitting Public narrow - ES1 - with interior plate - 85/21.5/139

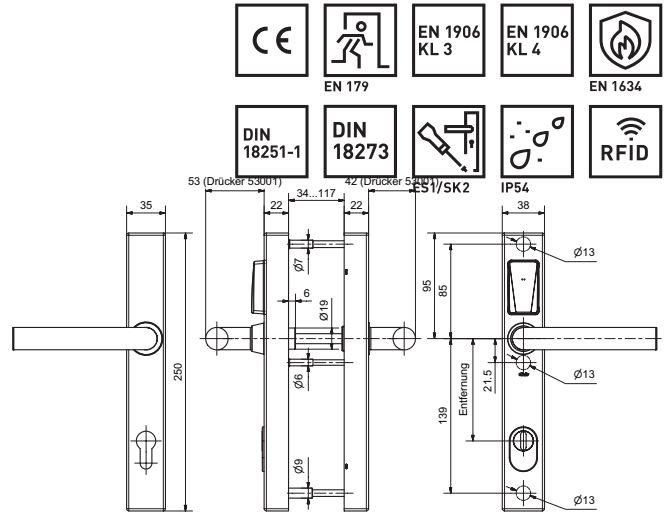

### Product profile

Battery-operated electronic organisation security plate ES1 for interior and exterior metal frame doors. Opening and closing from outside take place with contact reading of the RFID-medium. Door opening is always assured with the interior lever handle; EN179-compliant with suitable lever handle.

### Scope of supply

- E-fitting incl. interior plate
- Lever handle pair
- Battery pack
- Square spindle and screw set
- Quick guide

### Standard version

- For DIN left-hand/right-hand doors
- Identification with RFID Mifare DESfire EV 1 (ISO 14443A)
- programming via media or wireless access (868 MHz)
- exterior handle engaged, freewheeling

### 80586 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧ · ⑨

① Power supply	② Cut-out outs. ③ Cut-out ins.	④ Dis- tance	⑤ Lever handle design	⑥ Square spindle	⑦ Surface	⑧ Door thickness	⑨ Protection rose
<b>00 Lithium Battery</b>	<b>0</b> Blind <b>2</b> RZ <b>3</b> PZ	<b>00</b> Blind <b>72</b> 72 mm <b>74</b> 74 mm <b>78</b> 78 mm <b>88</b> 88 mm <b>92</b> 92 mm <b>94</b> 94 mm	<b>21</b> 53001 (5071) Memphis <b>22</b> 53002 (5066) Savannah <b>23</b> 53004 (5064) Oslo <b>24</b> 53010 (5057) Thun <b>25</b> 53011 (5062) New Orleans <b>26</b> 53013 (5098) Olten <b>31</b> 53003 (5059) Oslo angled <b>32</b> 53012 (5072) Memphis angled <b>33</b> 53009 (5066) Savannah angled <b>34</b> 50935 (5038) Lugano <b>35</b> 50937 (5040) Merkur <b>36</b> 50936 (5038V) Lugano angled <b>37</b> 50938 (50040) Merkur <b>39</b> 50939 (50042) Merkur angled <b>40</b> 50970 (50070) Appenzell <b>41</b> 50971 (50071) Appenzell <b>99</b> Spec. execution	<b>8</b> 8 mm <b>5</b> 8,5 mm <b>9</b> 9 mm	<b>00</b> Satin stainless steel <b>11</b> Polished stain. steel <b>22</b> Polished brass <b>33</b> Satin brass <b>44</b> Anti-bacterial <b>51</b> RAL 9005 black matt <b>55</b> Wrought iron look <b>99</b> Spec. execution	<b>01</b> 34 to 43 mm <b>02</b> 44 to 53 mm <b>03</b> 54 to 63 mm <b>04</b> 64 to 73 mm <b>05</b> 74 to 83 mm <b>06</b> 84 to 93 mm <b>07</b> 94 to 103 mm <b>08</b> 104 to 113 mm	<b>00</b> None/Blind <b>42</b> ES 1 ZA 19-28 mm

RZ: 74, 94 mm; PZ: 72, 92 mm