
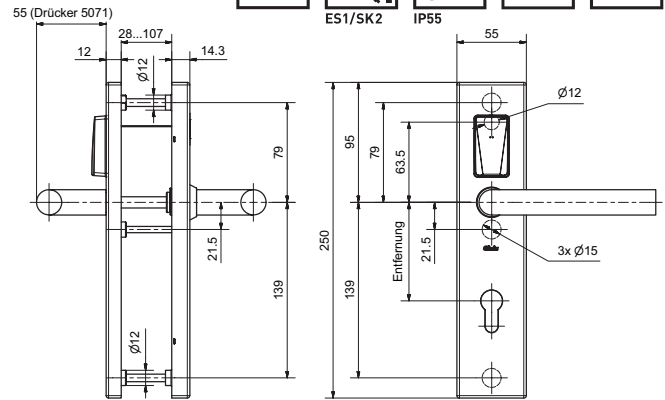


80340 E Protection Fitting

Public - ES1 - with interior button

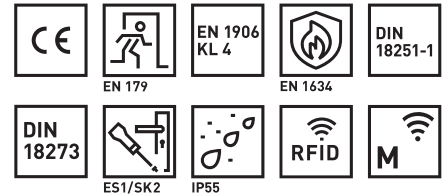

Product profile

Battery-operated electronic security plate for interior and exterior solid-leaf doors.

Opening and closing from outside take place with contact reading of the RFID-medium.

Door opening is always assured with the interior lever handle; EN179-compliant with suitable lever handle.

Additional functions (such as anti-gunman function) can be activated by pressing the electronic button integrated in the fitting.

Scope of supply

- E-fitting incl. square spindle
- Lever handle pair
- Screw set
- 4 x AAA lithium battery
- Quick guide

Standard version

- For DIN left-hand/right-hand doors
- Identification via RFID Mifare DESfire EV 1 (ISO 14443A)
- Programming via media or wireless access (868 MHz)
- Exterior handle lever coupled, blocked lever handle

80340 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8 · 9

1 Power supply	2 Cut-out outs.	3 Cut-out ins.	4 Distance	5 Lever handle design	6 Square spindle	7 Surface	8 Door thickness	9 Protection rose
00 Lithium Battery	0 Blind	00 Blind	11 5057 Thun	8 8 mm	00 Satin stainless steel	11 28 to 37 mm	00 Blind	
11 External, bus	2 RZ	70 70 mm	12 5062 New Orleans	5 8,5 mm	11 Polished stain. steel	12 38 to 47 mm	31 ES 1 RZ 06-10 mm	
	3 PZ	72 72 mm	13 5064 Oslo	9 9 mm	22 Polished brass	13 48 to 57 mm	32 ES 1 RZ 10-14 mm	
	4 PRZ	74 74 mm	14 5066 Savannah		33 Satin brass	14 58 to 67 mm	33 ES 1 RZ 14-18 mm	
		78 78 mm	15 5071 Memphis		44 Anti-bacterial	15 68 to 77 mm	34 ES 1 RZ 18-22 mm	
		85 85 mm	16 5087 Basel		51 RAL 9005 black matt	16 78 to 87 mm	35 ES 1 RZ 22-26 mm	
		88 88 mm	17 5098 Olten		55 Wrought iron look	17 88 to 97 mm	36 ES 1 RZ 26-29 mm	
		90 90 mm	18 5038 Lugano		99 Spec. execution	18 98 to 107 mm	41 ES 1+3 ZA 9-16 mm	
		92 92 mm	35 5040 Merkur					
		94 94 mm	37 50040 Merkur					
			40 50070 Appenzell					
			41 50071 Appenzell					
			99 Spec. execution					

RZ: 74, 78, 90, 94 mm; PZ: 70, 72, 78, 85, 88, 90, 92 mm; PRZ: 74, 78, 90, 94 mm