

# 1232

## Heavy duty mortice lock, panic function E



### Product profile

Same dimension as mortice locks 1105/1106

Panic function E: use knob set (lever handle on the inside, knob on the outside of the door)

For emergency exits according to EN 179 in the non public area of the building

For panic exits according to EN 1125 in the public area of the building such as commercial buildings, schools and hospitals, administrations, airports, shopping malls

Lock must not be used in combination with electric strikes

### Standard version

Backset 60 mm

Forend satin stainless steel

Forend 230x18 mm, radiussed

Clamp follower 9 mm

Lock case blue galvanised

With steel latch

Latch damper

Single turn deadbolt in steel, 13 mm

Centres 78 mm

Anti-thrust deadbolt with wide pin

Control bolt will be refacted with main latch

### Cutout

1232.6 RZ - latch withdrawal

1232.7 PZ - latch withdrawal

### Options

Backset 70 mm

Backset 80 mm

### Package

EP single packaging IP industrial packaging, 50 pces (left or right) SP

carpenter packaging, 50 pces (25 left / 25 right)

### Standards

EN 1634-1: EI 30'

EN 12209: 3M510F1HA30

Tested to EN 179 in combination with Glutz lever handle. For a current list of models please refer to our website: [www.glutz.com](http://www.glutz.com)

Tested to EN 1125 in connection with Glutz panic device 8614 and 8615

Striking plates tested in sets: For rebated doors B-1151.711 For flush edged doors B-1001.431




### Important note

On mortice locks for emergency / panic exit doors, cylinder with door knob must not be installed, and key must not be left in lock.

1232

### Heavy duty mortice lock, panic function E

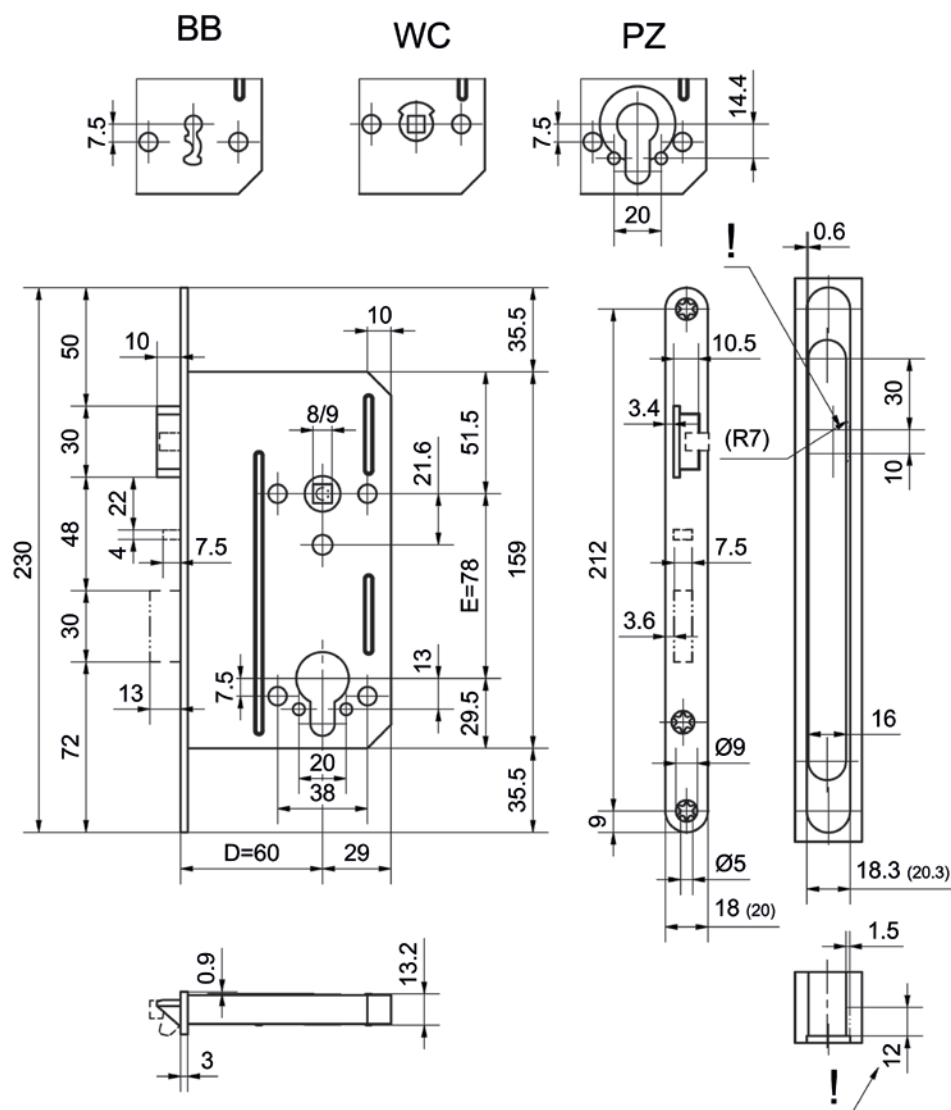

**11xx / 12xx / 240xx - schweres Einsteckschloss CH**  
Massbild alle Ausführungen