


52148

Stainless steel metal frame short plate

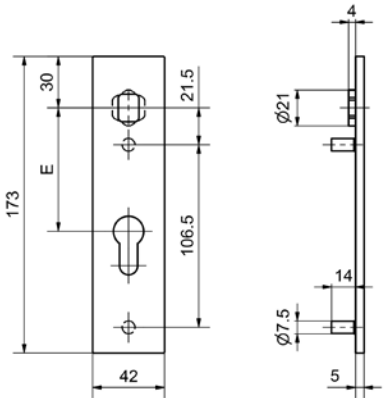

Standard version

Length: 173 mm
Width: 42 mm
Projection: 5 mm
Satin stainless steel
16 mm guide: Glutz glide inwards
Glutz easyfix
With 2 M5 threaded cams
Fixing distances:
106,5 mm

Cutout

52148.00 blind
52148.0 blank
52148.2 RZ E = 74 mm, 78 mm
52148.3 PZ E = 72 mm, 78 mm

Options

Polished stainless steel
RAL lacquered
PVD lacquered
Knob fixing

52148 · 1 · 2 · 3 · 4 · 5 · 6 · 7

1 Execution	2 Guide	3 Mounting fixe FEHO	4 Führungsnocken	5 Cutout	6 Centres	7 Surface
2 Piece thread cams	0 glide 1 twin glide 2 Buttonhole 9 blind	0 ohne 1 easyfix		00 without 01 BB 02 RZ 03 PZ	00 ohne 72 72 mm 74 74 mm 78 78 mm 88 88 mm 92 92 mm 94 94 mm	00 Stainless steel matt 11 Stainless steel polished 22 PVD brass polished 33 PVD brass matt 44 Antibacterial 51 RAL 9005 black matt 74 PVD Anthrazit 99 On request