

18983 MINT Combi

Multipoint lock, Combi (lever handle and key operated)



Product profile

For use in house and apartment entrance doors/hallway doors and in commercial buildings in difficult weather conditions or with a higher door seal pressure. Simple locking and unlocking using the lever handle followed by very smooth securing via the cylinder. The reversible DIN L+R comfort latch guarantees that the latch extends quietly and enters the striking plate gently. The solid design, hardened main bolt and four additional hardened bolts allow for construction of door systems up to RC4 resistance class. The lock is approved for fire resistance and smoke control tests in accordance with EN 1634.

Standard version

- Mechanical multipoint locking device
- Latch and lever handle blocking
- 4-part clamp follower, square 8/8.5/9 mm
- Without latch withdrawal
- Simple locking and unlocking using the lever handle
- Very smooth securing via the cylinder; single throw
- Hardened main bolt; 20 mm throw
- Four additional hardened bolts; 20 mm throw
- Dampened, reversible DIN L+R comfort latch with latch blocking
- Simultaneous latch and lever handle blocking

Standards

Lever handle locking: Lockable lock follower, tested to 80 Nm in accordance with EN 12209.



Important note

The cylinder screw is not centred in the forend. To determine the cylinder lengths: centre of forend = centre of lock cylinder.


Do not use a reduction sleeve for the Follower/square spindle.

18983 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

	① Cutout	② Distance	③ Backset	④ Follower	⑤ Forend	⑥ Direction	⑦ Surface	⑧ Options
CH	02 RZ	78 78 mm	60 60 mm	8 8,0 mm	02 18r x 1788 mm	0 DIN L	00 Stainless steel matt	0000 No options
	03 PZ		70 70 mm	9 9,0 mm	03 20r x 1788 mm	1 DIN R	99 On request	0110 Radiussed forend extension
			80 80 mm					
DIN	① Cutout	② Distance	③ Backset	④ Follower	⑤ Forend	⑥ Direction	⑦ Surface	⑧ Options
	02 RZ	72 72 mm	65 65 mm	8 8,0 mm	03 20r x 1833 mm	0 DIN L	00 Stainless steel matt	0000 No options
	03 PZ	74 74 mm	70 70 mm	9 9,0 mm		1 DIN R	99 On request	0110 Radiussed forend extension
		92 92 mm	80 80 mm					
D		94 94 mm						
	① Cutout	② Distance	③ Backset	④ Follower	⑤ Forend	⑥ Direction	⑦ Surface	⑧ Options
D	03 PZ	88 88 mm	65 65 mm	5 8,5 mm	03 20r x 1850 mm	0 DIN L	00 Stainless steel matt	0000 No options
			80 80 mm	9 9,0 mm		1 DIN R	99 On request	0110 Radiussed forend extension

18983 MINT Combi

Multipoint lock, Combi (lever handle and key operated)

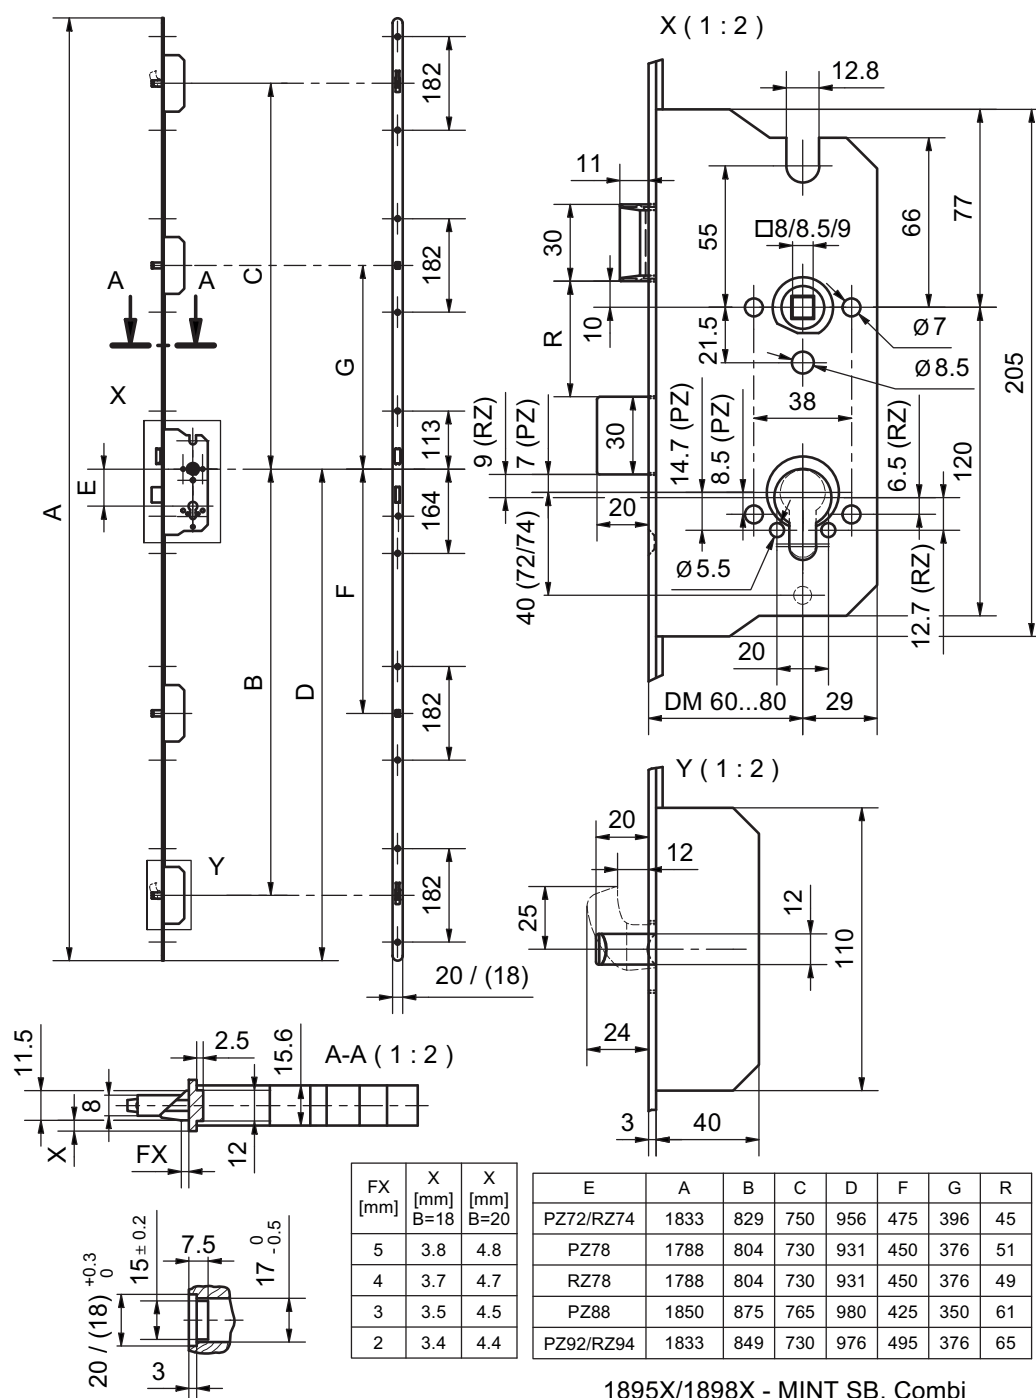

1895X/1898X - MINT SB, Combi
Massbild 4BR oder 2BR/2SHR