

## 16010 Adjustable lip striking plate 24 mm

### Lip striking plate as center striking plate



#### Product profile

Lip striking plate in stainless steel as center striking plate for latch/bolt. Integrated dummy component effeff 1418-13 ProFix® 2 with FaFix® adjustment. For the mortice and multipoint locks of the Glutz MINT family. The striking plate is designed for flush edged doors. Due to a radius on the lip a gently entering of the latch into the striking plate is guaranteed.

#### Standard version

- X-Dimension (X-Mass): 16 mm (adjusting range 3 mm)
- Distance: 72-94 mm
- Width: 24 mm + lip 8.5 mm = 32.5 mm
- Length: 210 mm
- Depth: 3 mm
- DIN L or R
- Matt stainless steel


#### Options

- Black plastic push-fit box for covering bolt mortice

#### Important note

The dummy component 1418-13 ProFix® 2 is not approved for fire resistance and smoke protection tests in accordance with EN 1634.

For smoke and fire protection applications use: effeff dummy component 1410-F2 Feuerschutz ProFix® 2 or effeff universal-dummy component 1410-F6 Feuerschutz ProFix® 2.

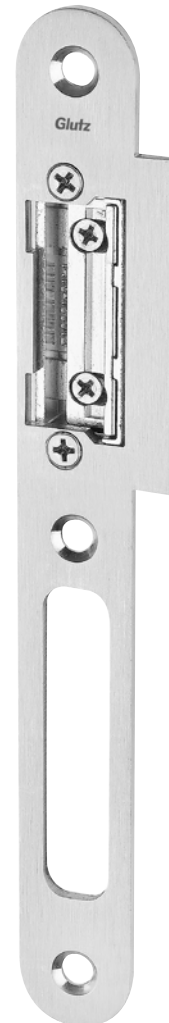

DIN L

## 16010 Adjustable lip striking plate 24 mm

Lip striking plate as center striking plate

