


82210 E-reader RFID remote

Surface-mounted/flush-mounted for indoors

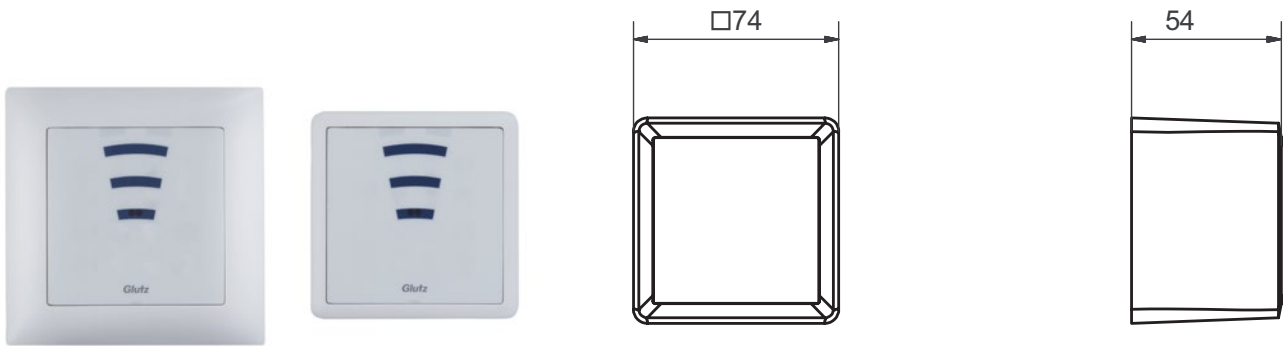

Product profile

RFID reader for indoor use.

The E-readers are available in attractive Feller EDIZIOdue (IP40) and can be combined with all switches, sockets and frames from the Feller assortment

Standard version

- Identification via RFID Mifare DESfire EV 1 (ISO 14443A)
- Glutz Wireless Access communication (868 MHz) or RS485 bus
- Feller Design IP40
- Surface-mounted 1-piece, dimensions 74 x 74 mm, 39/54 mm high
- Flush-mounted 1-piece, dimensions 88 x 88 mm (plastic), 94 x 94 mm (others)
- Mains operation (12-24 Vdc), power consumption: max. 150 mA at 12 V, 75 mA at 24 V

- 2 relay changeover contacts, potential-free, 0-30 V max. 1 A
- 2 inputs, galvanically isolated, 5-27 Vdc.

Scope of supply

- E-reader
- Quick guide

Important note

E-reader only operated with regulated direct current!

82210 • ① • ② • ③ • ④

① Power supply	② AP-housing	③ UP Frame	④ Front
11 External, bus	60 Black IP40 (54 mm) 61 White IP40 (54 mm) 30 Black IP40 (39 mm) 31 White IP40 (39 mm) 00 No AP-Housing	00 No UP Frame 60 Plastic black IP40 61 Plastic white IP40 70 Satin stainless steel IP40 71 Polished stainless steel IP40 82 Black gold polished IP40 81 Aluminium white IP40 90 Glass white IP40	60 Black IP40 61 White IP40