


## 82250 E frame reader

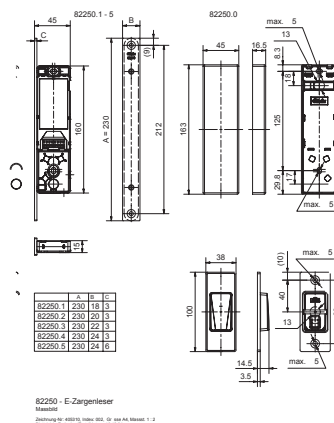

### Product profile

RFID reader for use with narrow metal profiles.  
The electronics are stored separately in a wall-mounted housing or mounted in the metal profile with a forend.

### Standard version

- Identification via RFID Mifare DESfire EV 1 (ISO 14443A)
- Communication radio 868 MHz or RS485 Bus
- Network operation (12 - 24 Vdc)
- 1 Switch contacts potential free
- 1 Input
- Size - outside (H x W x D): 38 x 100 x 3,5 - 14,5 mm
- Size - outside (H x W x D): 45 x 163 x 16,5 mm

### Scope of supply

- Antenna with 300 mm connection cable and base plate

- Forend controllerhousing with an electronics module / controllerhousing AP with an electronics module

### Important note

E-reader only operated with regulated direct current!

### 82250 • 1

#### 1 Mounting

- 0 AP Montage
- 1 Stulpmontage 18 x 230 rund
- 2 Stulpmontage 20 x 230 rund
- 3 Stulpmontage 22 x 230 eckig
- 4 Stulpmontage 24 x 230 eckig
- 5 Stulpmontage 24 x 230 eckig inkl. 3 mm Unterlage