


## 5369S

### Stainless steel long plate

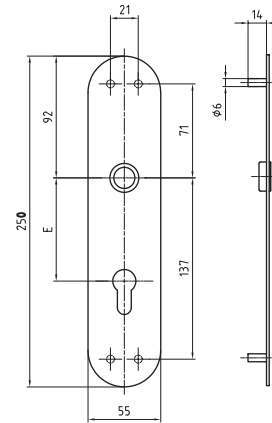

#### Standard version

Length: 250 mm  
 Width: 55 mm  
 Projection: 2 mm  
 Satin stainless steel  
 16 mm guide: Glutz glide inwards  
 Outside plate with four M4 threaded cams  
 Inside plate with 4 fixing holes  
 For 2 mm cylinder projection

#### Cutout

5369.00S blind  
 5369.0S blank  
 5369.2S RZ round cylinder  
 5369.3S PZ Profile: cylinder

#### Options

Polished stainless steel  
 RAL lacquered  
 PVD lacquered  
 16 mm outside  
 16 mm outside, conical  
 16 mm twin, inside  
 16 mm twin, semi-outside  
 16 mm twin, outside  
 16 mm twin, outside, conical  
 Glutz easyfix  
 Tribloc suitable  
 Cylinder protection roses for cylinder projection  
 RZ: 6, 8, 9, 10, 12, 15, 16, 18, 20, 22 mm  
 PZ: 6, 8, 10, 12, 14, 16, 18, 20, 22 mm  
 Knob fixing