

82580 E-Depomat



Product profile

The E-secure box enables the controlled issue and return of mechanical keys. Users are identified via a code or RFID and the selected key is entered in the eAccess logbook.

Standard version



- 12 VDC power supply (connection in the base of the housing, power supply included)
- Aluminium housing
- 82400 IP55 E-reader (black)
- I/O extender (for > 2 cylinder locks)
- Including cylinder locks with LED signals
- Prepared cut out for the locking device on the E-secure box housing (cylinder type 81817)
- Fully assembled (mechanical cylinders need to be provided)



Options

- 82580.02 = 1 x 2 storage spaces
- 82580.04 = 1 x 4 storage spaces
- 82580.08 = 1 x 8 storage spaces
- 82580.12 = 2 x 6 storage spaces
- 82580.16 = 2 x 8 storage spaces

82580 E-Depomat

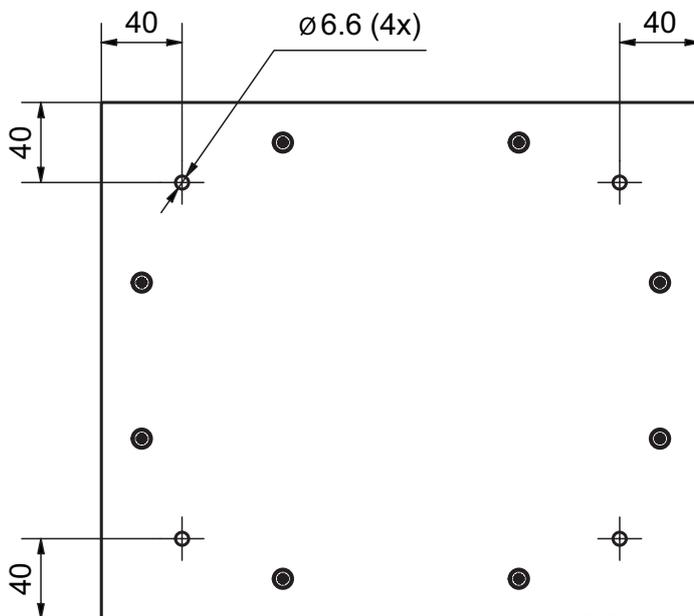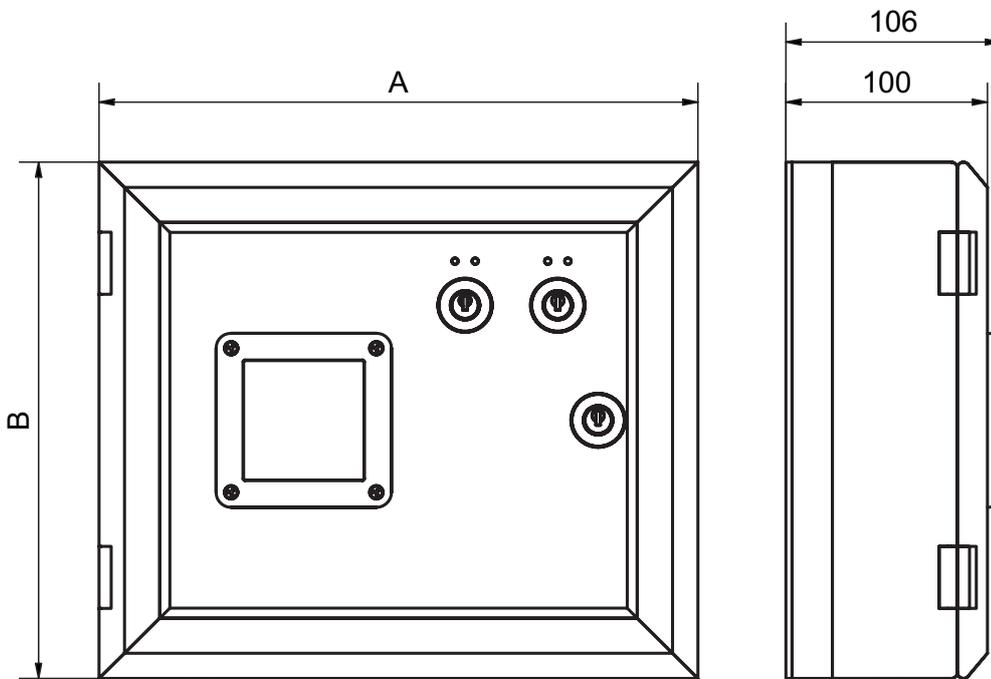

Version		A	B
82580.02	1x2	297 mm	258 mm
82580.04	1x4	389 mm	258 mm
82580.08	1x8	573 mm	258 mm
82580.12	2x6	481 mm	408 mm
82580.16	2x8	573 mm	408 mm