


18971 MINT SV ELK FF PC

Multipoint locking device, automatic locking, electric coupling, escape latch, panic C

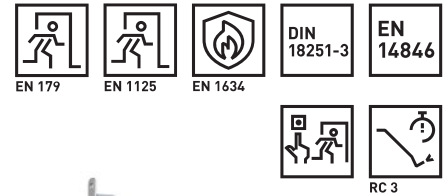

Product profile

For secured escape routes in main and side doors in commercial buildings. The panic function with split lock follower and separated lever handle control (outside/inside) combined with integrated escape latch (emergency door opener) and emergency button offers the ideal solution for electronically controlled emergency exits. Access is controlled via an identification system (e.g. badge) or the cylinder. Exit via the secured escape route is possible at all times by releasing the emergency button and panic function.

Standard version

- Feedback contacts, latch blocking and sequence control
- Split 3-part lock follower; square 9 mm
- Electrically couplable external lever handle
- Emergency opening via the cylinder (forced locking function)
- Panic C: panic side reversible inwards/outwards
- Monitoring contacts: lever handle L/R, deadbolt and door status, cylinder integrated
- Method of operation: standby/operating current can be switched
- Opening impulse protected against tampering: on/off switch
- Connection cable (not supplied): 12-pin; 10/20 m; 0.14 mm²
- Operating voltage: 12/24 V DC ±15%; 100/50 mA
- Inputs: 12/24 V DC at GND
- Outputs: potential free; loading capacity 30 V DC/100 mA
- Three hardened deadbolts; 20 mm throw
- Slider protection: mechanical top/bottom
- Dampened, reversible DIN L/R comfort latch
- Suitable for rotary knob cylinders
- Follower turning angle 35°



Important note

The cylinder screw is not centred in the forend. To determine the cylinder lengths: centre of forend = centre of lock cylinder.

Reducing bushes must not be used for the lock follower/spindle.

Use only internal bolt-switch contact.

Use only the 5920/59105 HESO panic square spindle.

Lever handles must be fixed mobile on plates/roses.


EN14846: set 11105 MS required!

18971 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

	① Cutout	② Distance	③ Backset	④ Follower	⑤ Forend	⑥ Direction	⑦ Surface	⑧ Options
CH	02 RZ	78 78 mm	60 60 mm	9 9,0 mm	02 18r x 1788 mm	0 DIN L (O)	00 Stainless steel matt	0000 No options
	03 PZ		70 70 mm		03 20r x 1788 mm	1 DIN R (O)	99 On request	0110 Radiussed forend extension
			80 80 mm			3 DIN L (I)		
						4 DIN R (I)		
DIN	02 RZ	72 72 mm	65 65 mm	9 9,0 mm	03 20r x 1744 mm	0 DIN L (O)	00 Stainless steel matt	0000 No options
	03 PZ	74 74 mm	70 70 mm			1 DIN R (O)	99 On request	0110 Radiussed forend extension
		92 92 mm	80 80 mm			3 DIN L (I)		
		94 94 mm				4 DIN R (I)		
O	03 PZ	88 88 mm	65 65 mm	9 9,0 mm	03 20r x 1850 mm	0 DIN L (O)	00 Stainless steel matt	0000 No options
			80 80 mm			1 DIN R (O)	99 On request	0110 Radiussed forend extension
						3 DIN L (I)		
						4 DIN R (I)		

18971 MINT SV ELK FF PC

Multipoint locking device, automatic locking, electric coupling, escape latch, panic C

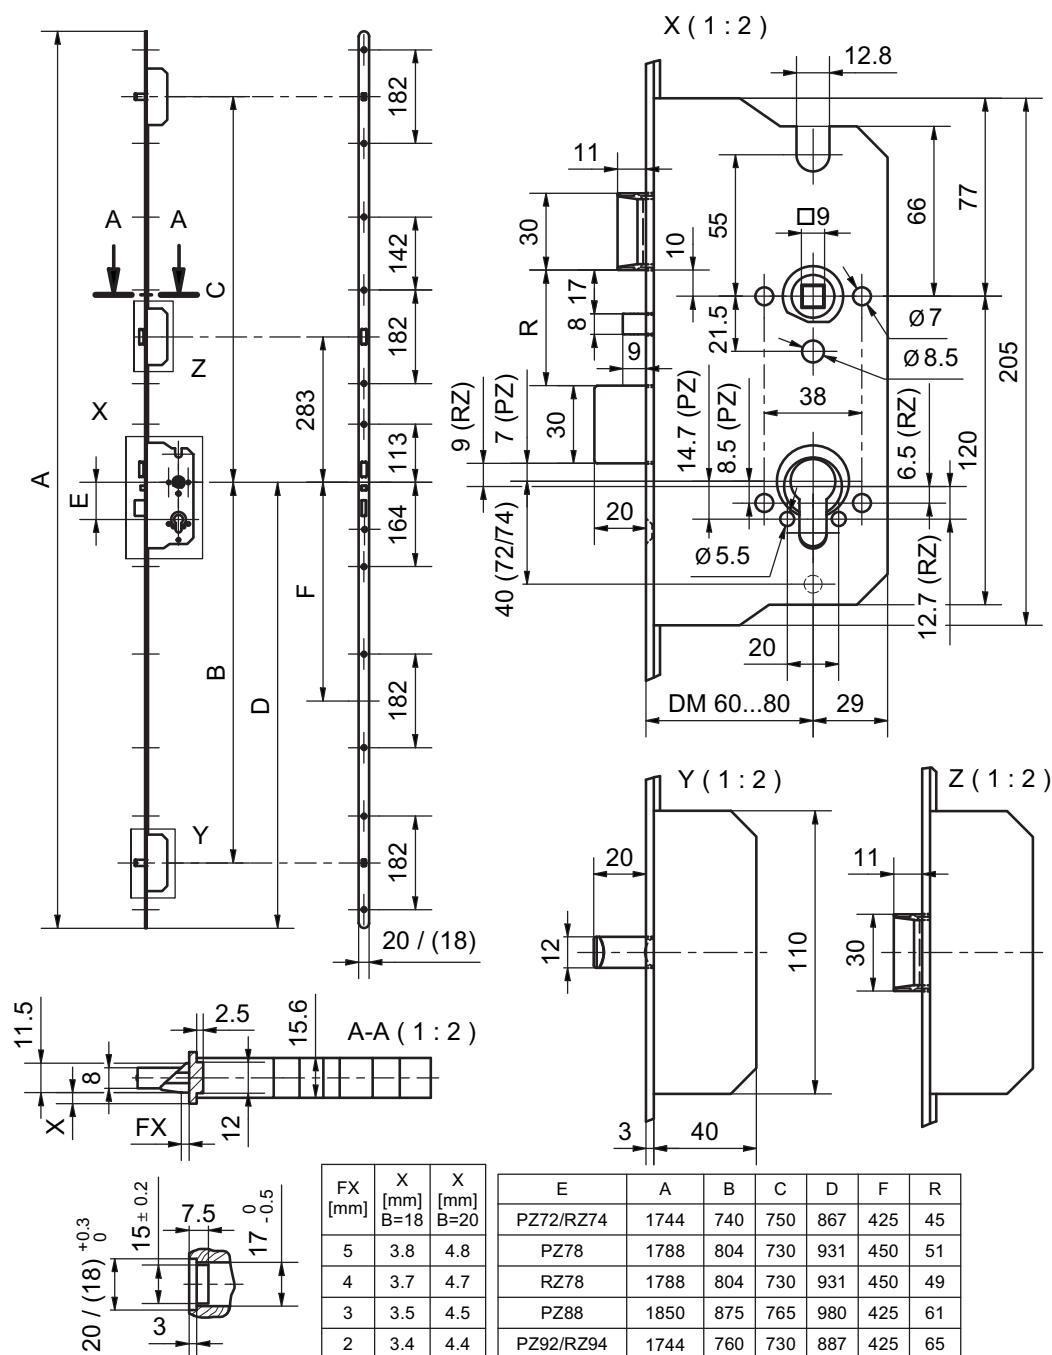

18971 - MINT SV ELK FF PC

Massbild 2BR mit Fluchtfalle