
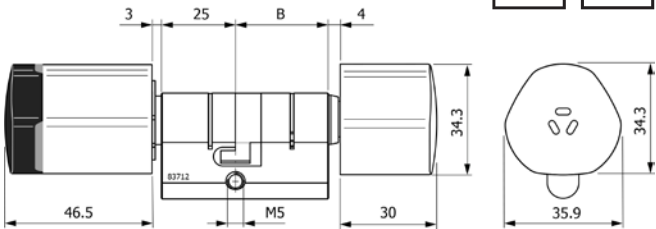


83712 E cylinder
EM / PZ / asymmetric

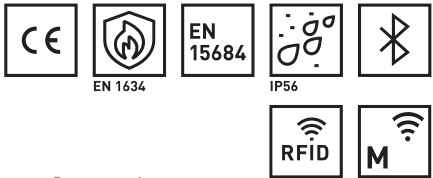

Product profile

Battery-powered electronic cylinder for internal and external doors. Opening and closing from both sides is done by contactless reading of the RFID medium or by the smartphone app and subsequent turning of the knob.

Standard version

- Exterior E-knob with access control function and battery
- Interior with mechanical thumbturn
- Identification via RFID Mifare DESfire EV1/2 (ISO 14443A)
- Programming via media, wireless access (868 MHz)
- Protection classes: IP56, EN 15684, RC2
- Fire protection EN 1634-2: 90 min
- Cam as offset locking lug
- BLE-ready

Options

- Low temperature (LT) for operation below 0°C

Scope of supply

- 1 E cylinder
- 1 battery
- 1 retaining screw M5x75
- 1 Quick Guide

Important note

- Not suitable for every lock type. Check compatibility with lock manufacturer.

83712 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

① eAccess_Lenght A (External) II	② eAccess_Length B (Internal) II	③ eAccesss_Opera- ting conditions	④ Security	⑤ Turn type	⑥ Version	⑦ eAccess_Finish	⑧ eAccess_ Antenna colour
25,0 mm	20,0 mm 25,0 mm 30,0 mm (Standard length) 35,0 mm	0 Standard 1 Low temperature (LT)	0 Standard	1 Glutz knob	5 Standard	0 Matt nickel 2 Polished chrome 3 Matt chrome 5 Black 7 Bronze effect	0 Black 1 White