
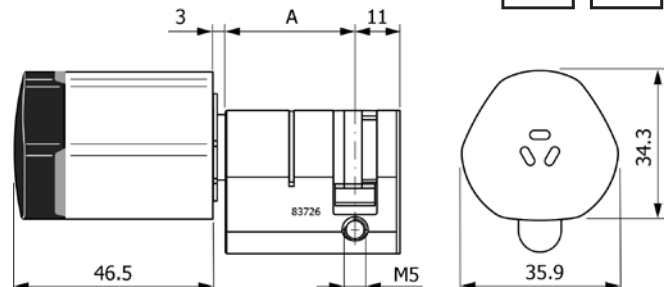


83726 E single cylinder

E / PZ / stop / screening

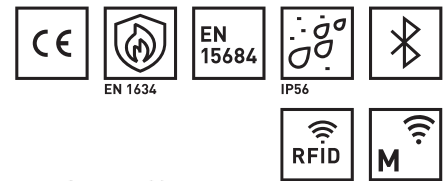

Product profile

Battery-powered electronic cylinder for IT locks, key switches or tube safes. Opening and closing from the outside is done by contactless reading of the RFID medium or by the smartphone app and subsequent turning of the knob.

- R360 - Standard 360°
- R3-6 - 3 to 6 h
- R6-9 - 6 to 9 h
- R12-3 - 12 to 3 h
- R9-12 - 9 to 12 h
- R12-6 - 12 to 6 h
- R6-12 - 6 to 12 h

Standard version

- Exterior E knob with access control function and battery
- Identification via RFID Mifare DESfire EV1/2 (ISO 14443A)

- Programming via media, wireless access (868 MHz)
- Protection class: IP56, EN 15684, RC2
- Fire protection EN 1634-2: 90 min
- BLE-ready

Options

- Low temperature (LT) for operation below 0°C
- Shortened rib side A by 8mm (ST8), for protection fittings with plug-pulling protection

Scope of supply

- 1 E single cylinder
- 1 battery
- 1 retaining screw M5x75

83726 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

① eAccess_Lenght A (External) II	② eAccess_Length B (Internal) II	③ eAccessess_Opera- ting conditions	④ Security	⑤ Turn type	⑥ Version	⑦ eAccess_Finish	⑧ eAccess_ Antenna colour
30,0 mm (Standard length) 35,0 mm 40,0 mm	00,0 Halbzylinder	0 Standard 1 Low temperature (LT)	0 Standard 4 ST8	0 Digital knob	1 R360 2 R3-6 3 R6-9 4 R12-3 5 R9-12 6 R12-6 7 R6-12	0 Matt nickel 2 Polished chrome 3 Matt chrome 5 Black 7 Bronze effect	0 Black 1 White