


12400 SV PE

Mortice lock, self-locking, panic E

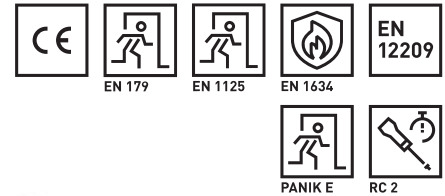

Product profile

For doors operated from the outside with a pull handle or knob.
Exiting from the panic side is possible at all times using the panic function.

For use in residential and commercial buildings, e.g. conference rooms and store rooms.

- Self-locking mortice lock with integrated sequence control and panic E function
- Centred lock case
- 20 mm deadbolt ejector
- Operation from the outside takes place via the cylinder (latch withdrawal) or in conjunction with E-fitting via an identification system
- Quiet closing due to the comfort latch and dampened deadbolt and latch throw
- Lever handle bearing with no backlash due to the two-part continuous clamp follower
- Linear lever handle operation and holding up torque due to the new spring design
- Reversible due to the reversible DIN L/R latch
- Follower turning angle 32°



Important note

Suitable for rotary knob and free-wheel cylinders

Reducing bushes must not be used for the lock follower/spindle

External, mechanical bolt-switch contacts are not recommended


12400 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

	① Lochung	② Distanz	③ Dornmass	④ Nuss	⑤ Stulp	⑥ Richtung	⑦ Oberfläche	⑧ Optionen
CH	06 RZW	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	07 PZW		70 70 mm		11 20r x 230 mm	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		12 22e x 248 mm*			
					18 20e x 230 mm*			
					19 18e x 230 mm			
					99 Auf Anfrage			
	① Lochung	② Distanz	③ Dornmass	④ Nuss	⑤ Stulp	⑥ Richtung	⑦ Oberfläche	⑧ Optionen
DIN	06 RZW	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	07 PZW	74 74 mm	65 65 mm		16 20r x 235 mm*	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		17 24r x 235 mm			
					99 Auf Anfrage			
	① Lochung	② Distanz	③ Dornmass	④ Nuss	⑤ Stulp	⑥ Richtung	⑦ Oberfläche	⑧ Optionen
0	07 PZW	88 88 mm	50 50 mm	9 9,0 mm	13 18r x 250 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
			60 60 mm		14 20r x 300 mm	1 DIN R (A)	99 Auf Anfrage	
			70 70 mm		99 Auf Anfrage			

* nicht mittlerer Stulp

12400 SV PE

Mortice lock, self-locking, panic E

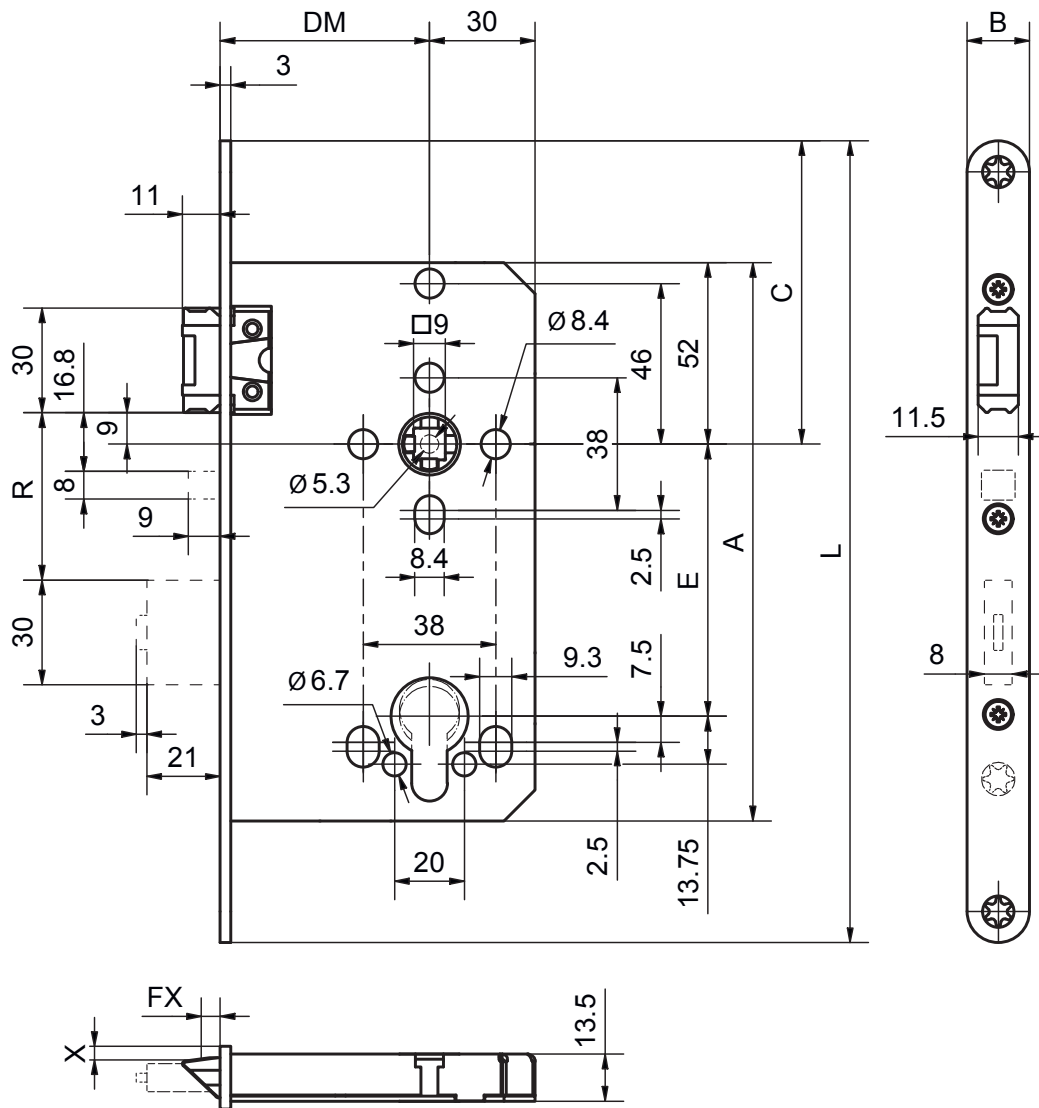

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

*nicht mittiger Stulp

E	DM	R	A	C	B	L
PZ72/RZ74	55/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5 118.5	18 20	250 300

**12400/12410

12XXX
Massbild