


12410 SV PB

Mortice lock, self-locking, panic B

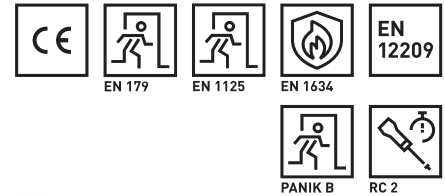

Product profile

For connecting or corridor doors. In daytime and night-time operation, the external lever handle can be coupled or decoupled via the cylinder by turning a key. Exiting from the panic side is possible at all times using the panic function.

Use in commercial buildings (administrative buildings, nursing homes) or extension doors in schools and hotels.

- Self-locking mortice lock with integrated sequence control and panic B function
- Centred lock case
- 20 mm deadbolt ejector
- Can be switched between daytime and night-time operation by turning a key
- In daytime operation, self-locking is automatically switched off, making it possible to close the doors very quietly
- Quiet closing due to the comfort latch and dampened deadbolt and latch throw
- Lever handle bearing with no backlash due to the two-part split clamp follower
- Linear lever handle operation and holding up torque
- Reversible due to the reversible DIN L/R latch
- Panic function reversible inwards/outwards
- Follower turning angle 32°



Important note

Suitable for rotary knob and free-wheel cylinders

Reducing bushes must not be used for the lock follower/spindle

External, mechanical bolt-switch contacts are not recommended

Only use the 5920/59105 HESO panic square spindle


Lever handles must be fixed rotating on plates/roses (easyfix®)

12410 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Lochung	2 Distanz	3 Dornmass	4 Nuss	5 Stulp	6 Richtung	7 Oberfläche	8 Optionen
CH	02 RZ	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	03 PZ		70 70 mm		11 20r x 230 mm	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		12 22e x 248 mm*	3 DIN L E		
					18 20e x 230 mm*	4 DIN R E		
DIN	02 RZ	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	03 PZ	74 74 mm	65 65 mm		16 20r x 235 mm*	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		17 24r x 235 mm	3 DIN L E		
					99 Auf Anfrage	4 DIN R E		
0	03 PZ	88 88 mm	50 50 mm	9 9,0 mm	13 18r x 250 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
			60 60 mm		14 20r x 300 mm	1 DIN R (A)	99 Auf Anfrage	
			70 70 mm		99 Auf Anfrage	3 DIN L E		
						4 DIN R E		

* nicht mittlerer Stulp

Mortice lock, self-locking, panic B

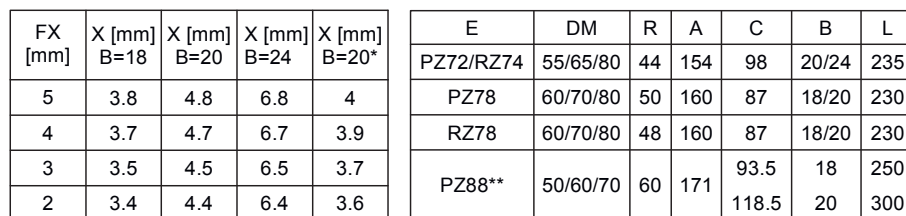

**12400/12410

Technical changes reserved 0124