

12300 PE

Mortice lock, panic E

Product profile

For doors operated from the outside with a pull handle or knob.
Opening is only possible by latch withdrawal using the key. Exiting from the panic side is possible at all times using the panic function.

For use in residential and commercial buildings, e.g. meeting rooms.

- Mortice lock with panic E function
- Centred lock case with single-throw 20 mm deadbolt ejector
- Operation from the outside via the cylinder (latch withdrawal)
- Quiet closing due to the comfort latch with dampened latch throw
- Lever handle bearing with no backlash due to the two-part continuous clamp follower
- Linear lever handle operation and holding up torque due to the new spring design
- Reversible due to the reversible DIN L/R latch
- Follower turning angle 32°

Important note

Thumbturn cylinders must not be used, with the exception of E-thumbturn cylinders with cam resetting.

When using a standard cylinder, the key must always be removed.




12300 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Cutout	2 Centres	3 Backset	4 Follower	5 Forend	6 Direction	7 Surface	8 Options
CH	02 RZ	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L [0]	00 Stainless steel matt	0000 No options
	03 PZ		70 70 mm		11 20r x 230 mm	1 DIN R [0]	99 On request	
			80 80 mm		99 On request			
	1 Cutout	2 Centres	3 Backset	4 Follower	5 On request	6 Direction	7 Surface	8 Options
DIN	02 RZ	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L [0]	00 Stainless steel matt	0000 No options
	03 PZ	74 74 mm	65 65 mm		16 20r x 235 mm*	1 DIN R [0]	99 On request	
			80 80 mm		17 24r x 235 mm			
					99 Auf Anfrage			

* nicht mittiger Stulp

12300 PE

Mortice lock, panic E

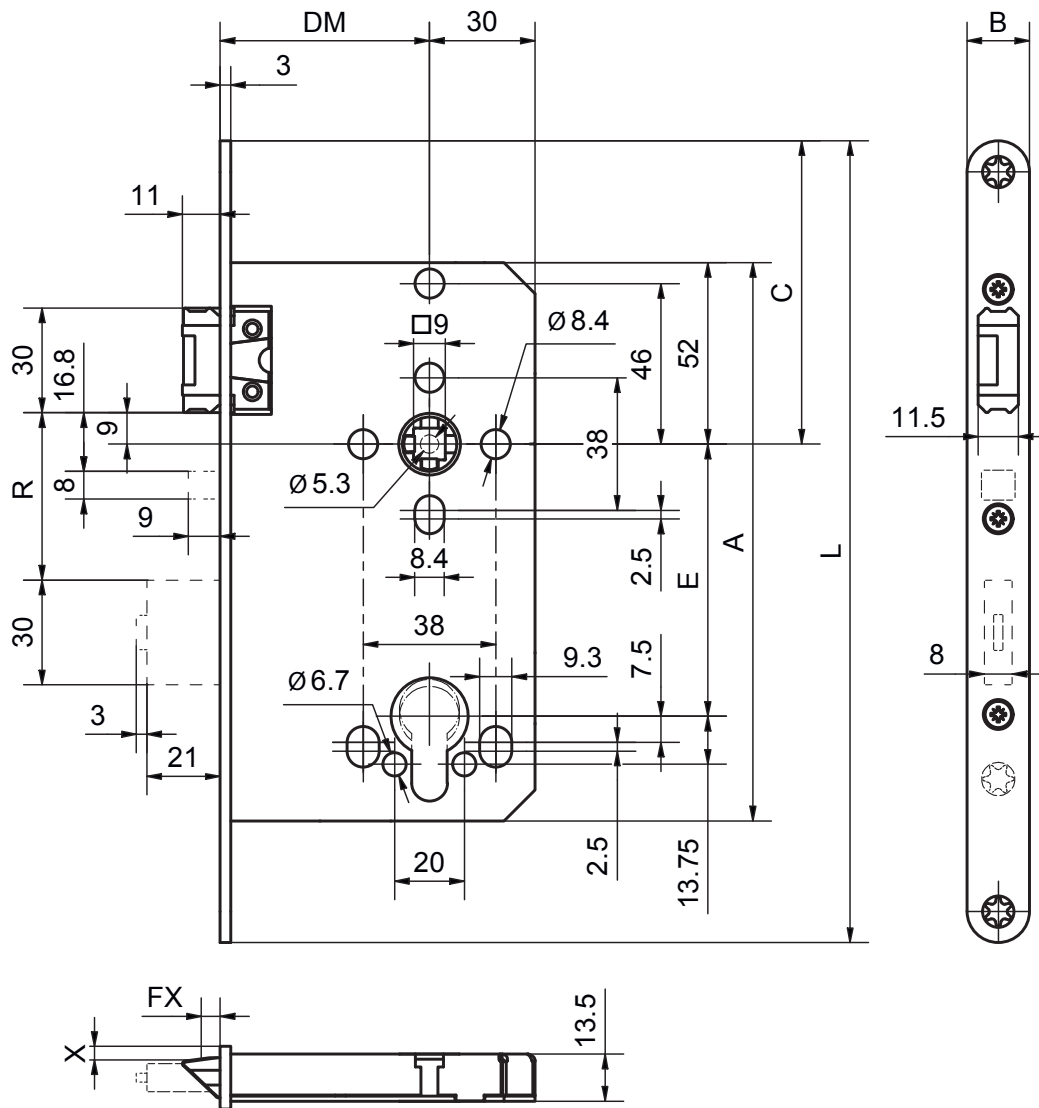

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

*nicht mittiger Stulp

E	DM	R	A	C	B	L
PZ72/RZ74	55/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5 118.5	18 20	250 300

**12400/12410

12XXX
Massbild