

12340 PD

Mortice lock, panic D



Product profile

For connecting or corridor doors. In daytime and night-time operation, the external lever handle can be coupled or decoupled via the cylinder by turning a key until it stops. When the panic function is activated from inside, the external lever handle is automatically coupled and access from the outside therefore becomes possible at any time (passage function).

For use in commercial buildings, e.g. nursing homes, schools and sports halls.

- Mortice lock with panic D function
- Centred lock case with single-throw 20 mm deadbolt ejector
- By turning a key until it stops, the lock is locked/unlocked and the external lever handle simultaneously coupled/decoupled
- When locked, the external lever handle is decoupled; if the panic function is activated, the external lever handle is automatically coupled
- Quiet closing due to the comfort latch with dampened latch throw
- Lever handle bearing with no backlash due to the two-part split clamp follower
- Linear lever handle operation and holding up torque
- Reversible due to the reversible DIN L/R latch
- Panic function reversible inwards/outwards
- Follower turning angle 32°



Important note

Thumbturn cylinders must not be used, with the exception of E-thumbturn cylinders with cam resetting.

When using a standard cylinder, the key must always be removed.

Lever handles must be fixed rotating on plates/roses (easyfix®)


12340 • 1 • 2 • 3 • 4 • 5 • 6 • 7 • 8

	1 Lochung	2 Distanz	3 Dornmass	4 Nuss	5 Stulp	6 Richtung	7 Oberfläche	8 Optionen
CH	02 RZ	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	03 PZ		70 70 mm		11 20r x 230 mm	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		99 Auf Anfrage	3 DIN L E		
						4 DIN R E		
	1 Lochung	2 Distanz	3 Dornmass	4 Nuss	5 Stulp	6 Richtung	7 Oberfläche	8 Optionen
DIN	02 RZ	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	03 PZ	74 74 mm	65 65 mm		16 20r x 235 mm*	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		17 24r x 235 mm	3 DIN L E		
					99 Auf Anfrage	4 DIN R E		

* nicht mittlerer Stulp

12340 PD

Mortice lock, panic D

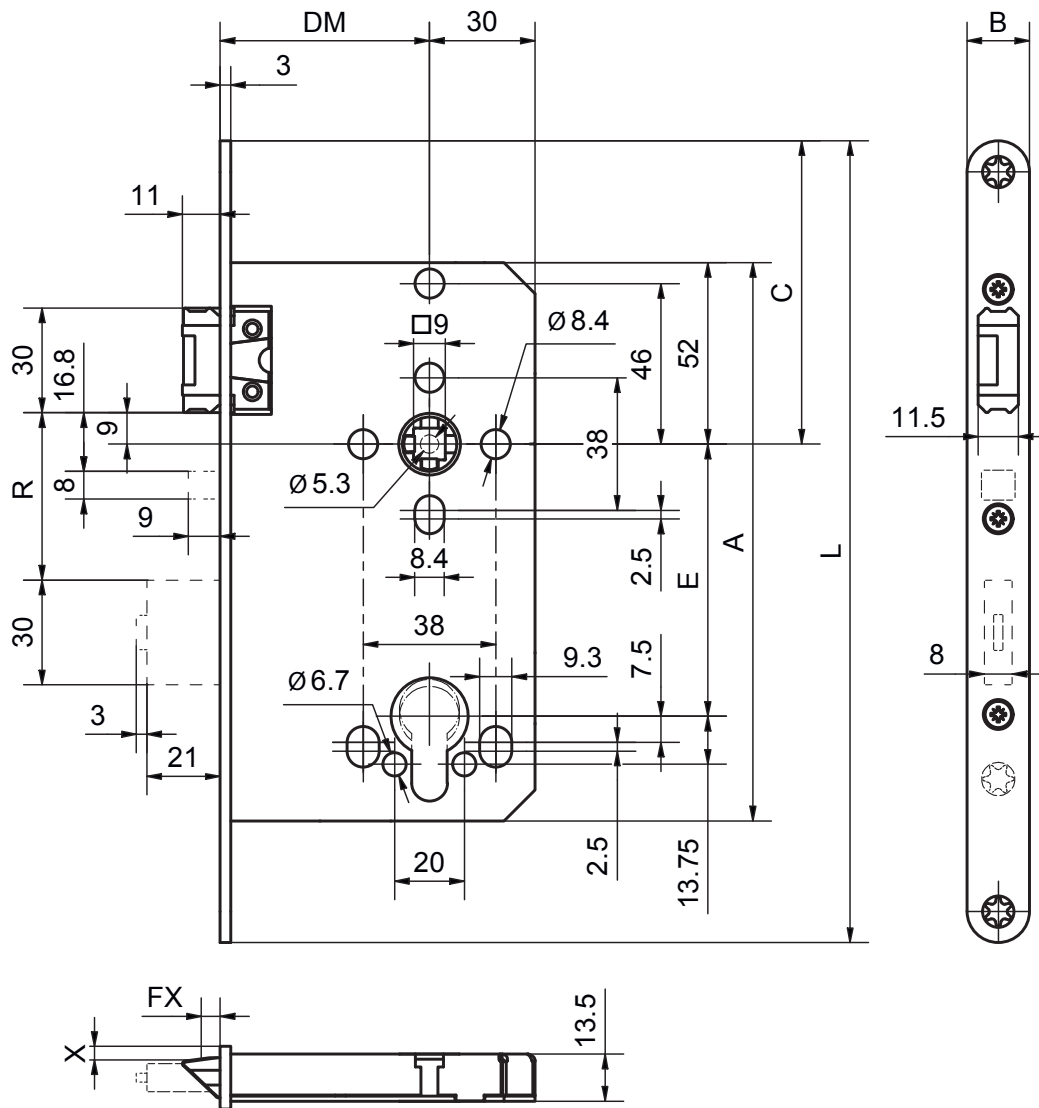

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

*nicht mittiger Stulp

E	DM	R	A	C	B	L
PZ72/RZ74	55/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5 118.5	18 20	250 300

**12400/12410

12XXX
Massbild