

12501

Catch lock with latch blocking



Product profile

For doors with low security demands (break-in), but with latch blocking, which are operated from the outside using a pull handle or knob. Opening is only possible by latch withdrawal using the key or an E-fitting. Exiting from the panic side is possible at all times using the panic function.

For use in public buildings, office buildings, banks, hospitals, hotels and upmarket residential buildings.

- Key-operated latch mortice lock with latch blocking and panic E function
- Centred lock case
- Operation from the outside via the cylinder (latch withdrawal) or electronic fitting
- Quiet closing due to the comfort latch with dampened latch throw
- Lever handle bearing with no backlash due to the two-part continuous clamp follower
- Linear lever handle operation and holding up torque due to the new spring design
- Reversible due to the reversible DIN L/R latch
- Follower turning angle 32°




12501 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Lochung	2 Distanz	3 Dornmass	4 Nuss	5 Stulp	6 Richtung	7 Oberfläche	8 Optionen
CH	06 RZW	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	07 PZW		70 70 mm		11 20r x 230 mm	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		12 22e x 248 mm*			
					18 20e x 230 mm*			
					19 18e x 230 mm			
					99 Auf Anfrage			
	1 Lochung	2 Distanz	3 Dornmass	4 Nuss	5 Stulp	6 Richtung	7 Oberfläche	8 Optionen
DIN	06 RZW	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	07 PZW	74 74 mm	65 65 mm		16 20r x 235 mm*	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		17 24r x 235 mm			
					99 Auf Anfrage			

* nicht mittiger Stulp

12501

Catch lock with latch blocking

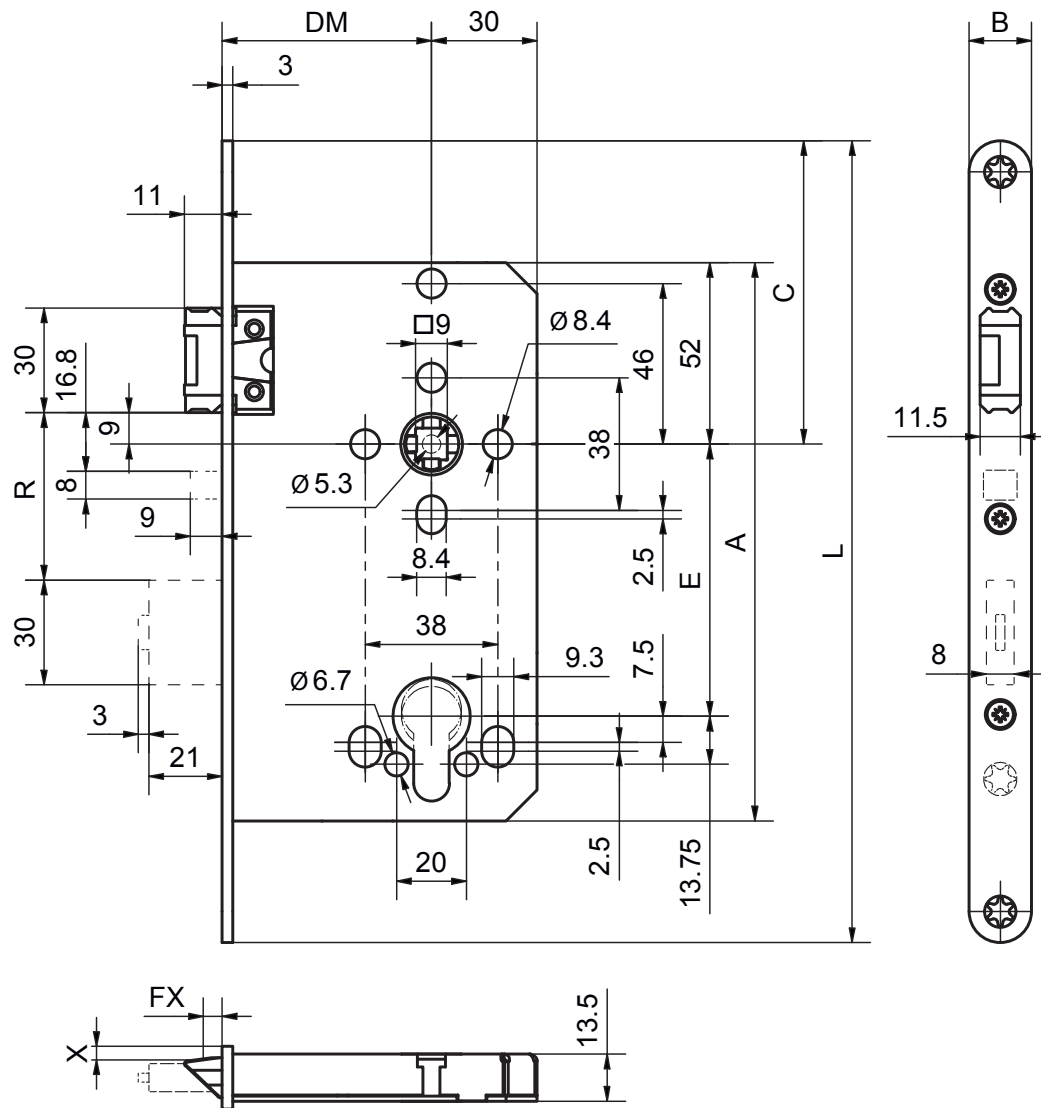

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

E	DM	R	A	C	B	L
PZ72/RZ74	55/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5	18	250
				118.5	20	300

*nicht mittiger Stulp

***12400/12410

12XXX
Massbild