

12500 PE

Latch mortice lock



Product profile

For doors (single- and double-leaf) with low security demands (break-in), which are operated from the outside using a pull handle or knob. Opening is only possible by latch withdrawal using the key. Exiting from the panic side is possible at all times using the panic function. For use in public buildings, office buildings, schools, hospitals and upmarket residential buildings.

- Latch mortice lock with panic E function
- Centred lock case
- Operation from the outside via the cylinder (latch withdrawal)
- Quiet closing due to the comfort latch with dampened latch throw
- Lever handle bearing with no backlash due to the two-part continuous clamp follower
- Linear lever handle operation and holding up torque due to the new spring design
- Reversible due to the reversible DIN L/R latch
- Follower turning angle 32°




12500 • 1 • 2 • 3 • 4 • 5 • 6 • 7 • 8

	1 Lochung	2 Distanz	3 Dornmass	4 Nuss	5 Stulp	6 Richtung	7 Oberfläche	8 Optionen
CH	06 RZW	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	07 PZW		70 70 mm		11 20r x 230 mm	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		99 Auf Anfrage			
	1 Lochung	2 Distanz	3 Dornmass	4 Nuss	5 Stulp	6 Richtung	7 Oberfläche	8 Optionen
DIN	06 RZW	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	07 PZW	74 74 mm	65 65 mm		16 20r x 235 mm*	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		17 24r x 235 mm			
					99 Auf Anfrage			

* nicht mittlerer Stulp

12500 PE

Latch mortice lock

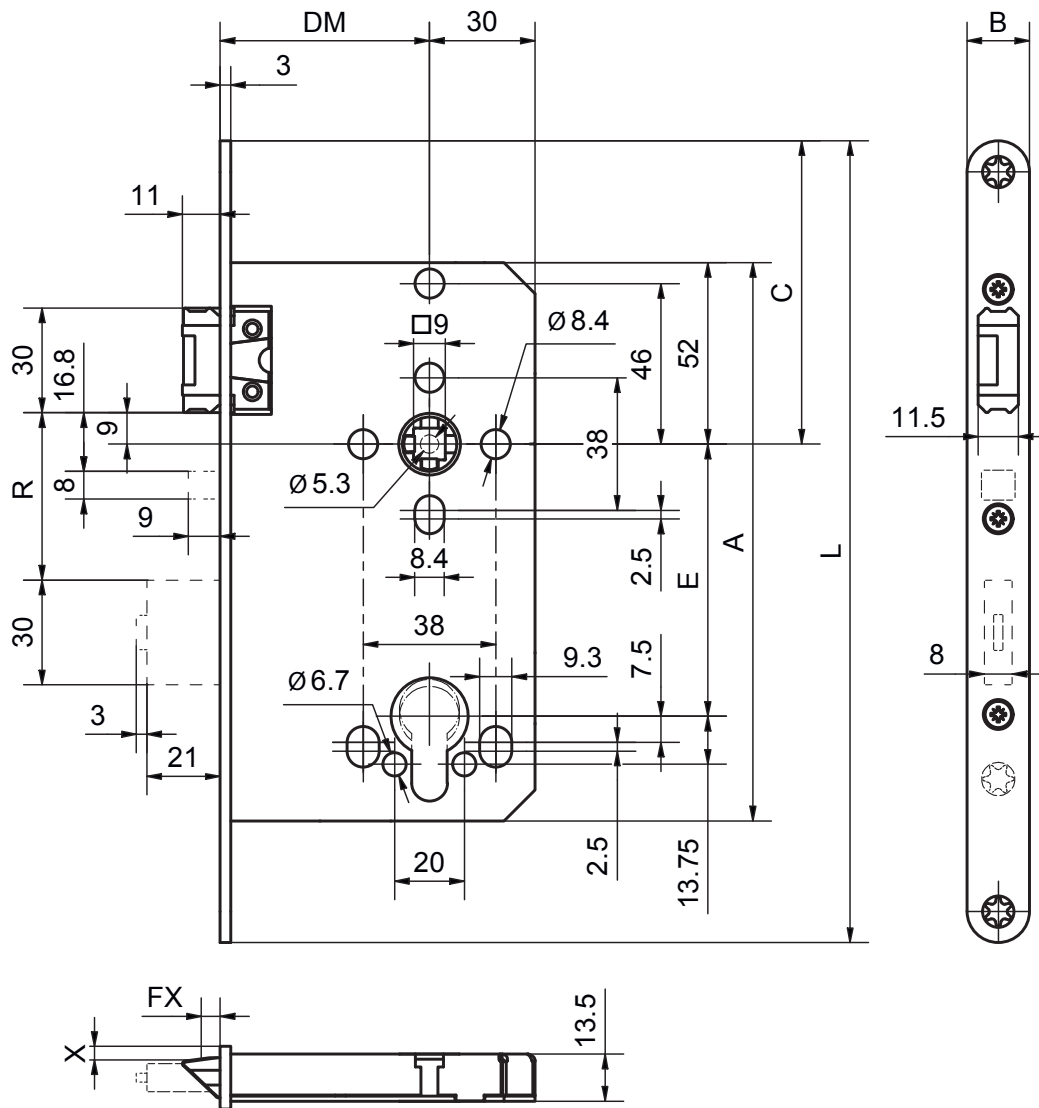

FX [mm]	X [mm] B=18	X [mm] B=20	X [mm] B=24	X [mm] B=20*
5	3.8	4.8	6.8	4
4	3.7	4.7	6.7	3.9
3	3.5	4.5	6.5	3.7
2	3.4	4.4	6.4	3.6

*nicht mittiger Stulp

E	DM	R	A	C	B	L
PZ72/RZ74	55/65/80	44	154	98	20/24	235
PZ78	60/70/80	50	160	87	18/20	230
RZ78	60/70/80	48	160	87	18/20	230
PZ88**	50/60/70	60	171	93.5 118.5	18 20	250 300

**12400/12410

12XXX
Massbild