

12402 SV PE double-leaf

Mortice lock, self-locking, panic E, double-leaf



Product profile

For double-leaf full panic doors operated from the outside with a pull handle or knob. Exiting from the panic side is possible at all times using the panic function.

For use in commercial buildings e.g. conference rooms and store rooms.

- Self-locking double-leaf mortice lock with integrated sequence control and panic E function
- Only in combination with the full-leaf strike box 12100
- Centred lock case
- 20 mm deadbolt ejector
- Operation from the outside takes place via the cylinder (latch withdrawal) or in conjunction with E-fitting via an identification system
- Quiet closing due to the comfort latch and dampened deadbolt and latch throw
- Lever handle bearing with no backlash due to the two-part continuous clamp follower
- Linear lever handle operation and holding up torque due to the new spring design
- Reversible due to the reversible DIN L/R latch
- Follower turning angle 32°



Important note

Suitable for rotary knob and free-wheel cylinders


Reducing bushes must not be used for the lock follower/spindle

12402 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Lochung	2 Distanz	3 Dornmass	4 Nuss	5 Stulp	6 Richtung	7 Oberfläche	8 Optionen
CH	06 RZW	78 78 mm	60 60 mm	9 9,0 mm	10 18r x 230 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	07 PZW		70 70 mm		11 20r x 230 mm	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		99 Auf Anfrage			
DIN	06 RZW	72 72 mm	55 55 mm	9 9,0 mm	15 20r x 235 mm	0 DIN L (A)	00 Edelstahl matt	0000 Keine Optionen
	07 PZW	74 74 mm	65 65 mm		16 20r x 235 mm*	1 DIN R (A)	99 Auf Anfrage	
			80 80 mm		17 24r x 235 mm			
					99 Auf Anfrage			

* nicht mittlerer Stulp

Mortice lock, self-locking, panic E, double-leaf

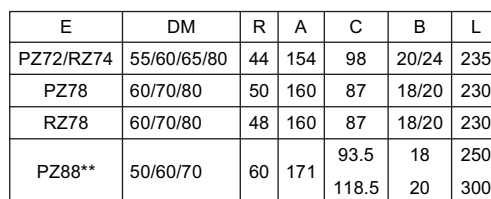

****12400/12410**

Technical changes reserved 0424