


80590 E Organisation Fitting

Public narrow - ES1 - for panic bars - 84/21.5/112

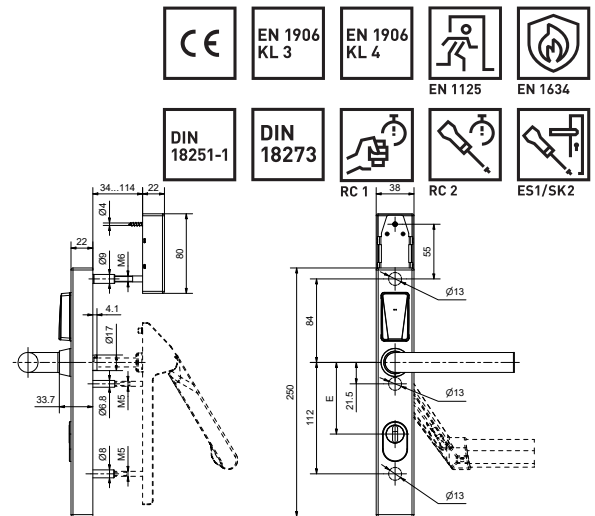

80590 - E-Organisationsbeschlag Public, ES1
Maßbild Passend zu Panik-Stangen EN1125 (EVVA, ECO)
Zeichnung Nr. 80590, Index 001, Größe A4, Massstab 1:2
Blatt 1/1, Fertigungs-Schreibdatum: 10.11.03

Product profile

Battery-operated electronic organisation security plate ES1 for interior and exterior metal frame doors. Opening and closing from outside take place with contact reading of the RFID-medium. Door opening is assured at all times with the panic bar mounted on the inside (panic function).

Standard version

- For DIN left-hand/right-hand doors
- Identification via RFID Mifare DESfire EV 1 (ISO 14443A)
- Programming via media or wireless access (868 MHz)
- External lever handle engaged, freewheeling

Scope of supply

- E-fitting incl. interior battery compartment
- Lever handle for exterior
- Battery pack
- Square spindle and screw set
- Quick guide

80590 • 1 • 2 • 3 • 4 • 5 • 6 • 7 • 8 • 9

1 Power supply	2 Cut-out outs. 3 Cut-out ins.	4 Dis- tance	5 Lever handle design	6 Square spindle	7 Surface	8 Door thickness	9 Protection rose
00 Lithium Battery	0 Blind	72 72 mm	21 53001 (5071) Memphis	8 8 mm	00 Satin stainless steel	01 34 to 43 mm	00 None/Blind
	2 RZ	78 78 mm	22 53002 (5066) Savannah	5 8,5 mm	11 Polished stain. steel	02 44 to 53 mm	42 ES 1 ZA 19-28 mm
	3 PZ		23 53004 (5064) Oslo	9 9 mm	22 Polished brass	03 54 to 63 mm	
			24 53010 (5057) Thun		33 Satin brass	04 64 to 73 mm	
			25 53011 (5062) New Orleans		44 Anti-bacterial	05 74 to 83 mm	
			26 53013 (5098) Olten		51 RAL 9005 black matt	06 84 to 93 mm	
			31 53003 (5059) Oslo angled		55 Wrought iron look	07 94 to 103 mm	
			32 53012 (5072) Memphis angled		99 Spec. execution	08 104 to 113 mm	
			33 53009 (5066) Savannah angled				
			34 50935 (5038) Lugano				
			35 50937 (5040) Merkur				
			36 50936 (5038V) Lugano angled				
			37 50938 (50040) Merkur				
			39 50939 (50042) Merkur angled				
			40 50970 (50070) Appenzell				
			41 50971 (50071) Appenzell				
			99 Spec. execution				

RZ: 78 mm; PZ: 72 mm