


18957 MINT E-Beschlag

Multipoint lock for E-fittings (lever handle operated)



Product profile

For use in house and apartment entrance doors in difficult weather conditions or with a higher door seal pressure. Use exclusively in conjunction with E protection fittings with upwards and downwards lever handle movement. When the outside lever handle is moved upwards, the deadbolts are thrown and blocked. Subsequent activation of the E-fitting using the authorised medium blocks the lever handle.

The door is completely locked. The door is opened via identification on the E-fitting. Moving the lever handle downwards unlocks the lock.

Standard version

- Mechanical multipoint locking device
- Latch and deadbolt blocking
- 4-part clamp follower; square 8/8.5/9 mm
- Simple locking and unlocking using the lever handle with integrated latch and deadbolt blocking
- Very simple securing/release via the E-fitting
- Emergency opening via the cylinder (double throw) with latch withdrawal
- Hardened main bolt; 25 mm throw
- Two additional hardened bolts; 20 mm throw
- Two additional hardened hookbolts; 24 mm throw
- Dampened, reversible DIN L+R comfort latch



Important note

The cylinder screw is not centred in the forend. To determine the cylinder lengths: centre of forend = centre of lock cylinder.


Do not use a reduction sleeve for the Follower/square spindle.

Do not use a thumbturn cylinder. When using a standard cylinder the key has to be drawn-off.

18957 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

	1 Cutout	2 Distance	3 Backset	4 Follower	5 Forend	6 Direction	7 Surface	8 Options
CH	02 RZ	78 78 mm	60 60 mm	8 8,0 mm	02 18r x 1788 mm	0 DIN L	00 Stainless steel matt	0000 No options
	03 PZ		70 70 mm	9 9,0 mm	03 20r x 1788 mm	1 DIN R	99 On request	
			80 80 mm					
DIN	02 RZ	72 72 mm	65 65 mm	8 8,0 mm	03 20r x 1833 mm	0 DIN L	00 Stainless steel matt	0000 No options
	03 PZ	74 74 mm	70 70 mm	9 9,0 mm		1 DIN R	99 On request	
		92 92 mm	80 80 mm					
		94 94 mm						
0	03 PZ	88 88 mm	65 65 mm	5 8,5 mm	03 20r x 1850 mm	0 DIN L	00 Stainless steel matt	0000 No options
			80 80 mm	9 9,0 mm		1 DIN R	99 On request	

18957 MINT E-Beschlag Multipoint lock for E-fittings (lever handle operated)

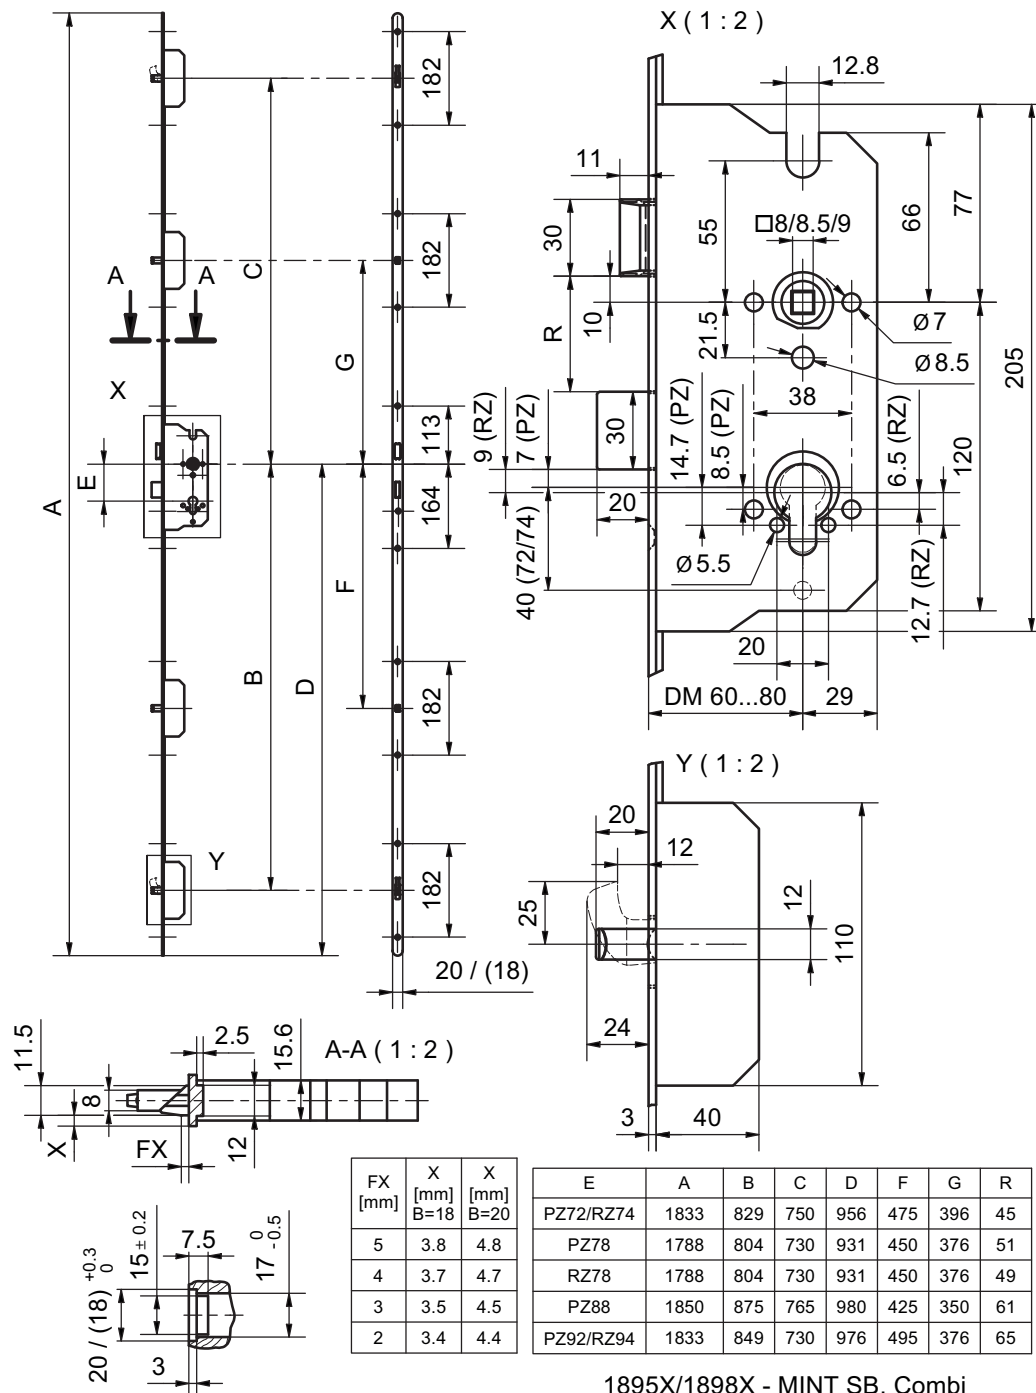

1895X/1898X - MINT SB, Combi
Massbild 4BR oder 2BR/2SHR