


83202 double-knob E cylinder

EM / RZ

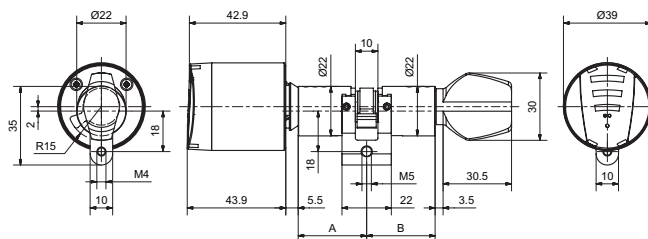

Product profile

Battery-operated electronic cylinder for interior and exterior doors. The standard solution enables temporally limited, individually programmable access. Opening and closing from outside is done by contactless reading of the RFID medium and subsequent turning of the knob. Opening and closing from the inside is always assured with the mechanical knob.

Scope of supply

- E-knob for E-cylinder, including batteries
- E-module
- Mechanical knob

Standard version

- Exterior E knob with access control function and battery
- Interior with mechanical knob
- Identification via RFID Mifare DESfire EV1 (ISO 14443A)
- Programming via media or wireless access (868 MHz)
- Protection class: IP65, EN 15684* (* in preparation)
- Security: Predetermined breaking point on the knob, anti-drilling and core extraction protection, 3DES encryption

83202 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

① Version	② Length A (Outside)	③ Length B (inside)	④ Surface Outside ⑤ Surface inside	⑥ Security	⑦ Knob type	⑧ Reading system
S Standard	31,0 mm (Base length)	31,0 mm (Base length)	0 Nickel plated	0 Standard	1 Glutz knob	0 Mifare
M Pinion 10	36,0 mm (+05 mm)	36,0 mm (+05 mm)	1 Nickel polished			
I Biffar	41,0 mm (+10 mm)	41,0 mm (+10 mm)	2 Brass polished			
Q Pinion 18	46,0 mm (+15 mm)	46,0 mm (+15 mm)				
	51,0 mm (+20 mm)	51,0 mm (+20 mm)				
	56,0 mm (+25 mm)	56,0 mm (+25 mm)				
	61,0 mm (+30 mm)	61,0 mm (+30 mm)				
	66,0 mm (+35 mm)	66,0 mm (+35 mm)				
	71,0 mm (+40 mm)	71,0 mm (+40 mm)				
	76,0 mm (+45 mm)	76,0 mm (+45 mm)				
	81,0 mm (+50 mm)	81,0 mm (+50 mm)				
	86,0 mm (+55 mm)	86,0 mm (+55 mm)				
	91,0 mm (+60 mm)	91,0 mm (+60 mm)				