

24010

Heavy latch mortice lock with low friction latch Delrin



Product profile

For commercial and public buildings, schools, hospitals and upmarket housing

Standard version

- Blind
- Round or profile cylinder with latch withdrawal
- Distance 78 mm
- Backset 60 mm
- Clamp follower 9 mm
- Forend radiused 18 x 230 mm, matt stainless steel
- Blue galvanised lock case
- Delrin latch
- Latch damper

Package

Single packaging

Package, 10 pcs (left or right)

Standards

EN 1634-1: EI 30

EN 12209: 3M510F-H030

Tested to EN 179 in combination with Glutz Lever handle.

For a current list of models please refer to our Website: www.glutz.com.

Tested to EN 1125 in connection with Glutz Panic device 8615.




24010 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

① Cutout	② Centres	③ Backset	④ Follower	⑤ Forend	⑥ Direction	⑦ Surface	⑧ Options
00 without	78 78 mm	60 60 mm	8 8 mm	10 18 x 230 mm	0 DIN L [O]	00 Stainless steel matt	0000 No options
06 RZW		70 70 mm	9 9 mm		1 DIN R [O]	99 On request	
07 PZW		80 80 mm					

24010

Heavy latch mortice lock with low friction latch Delrin

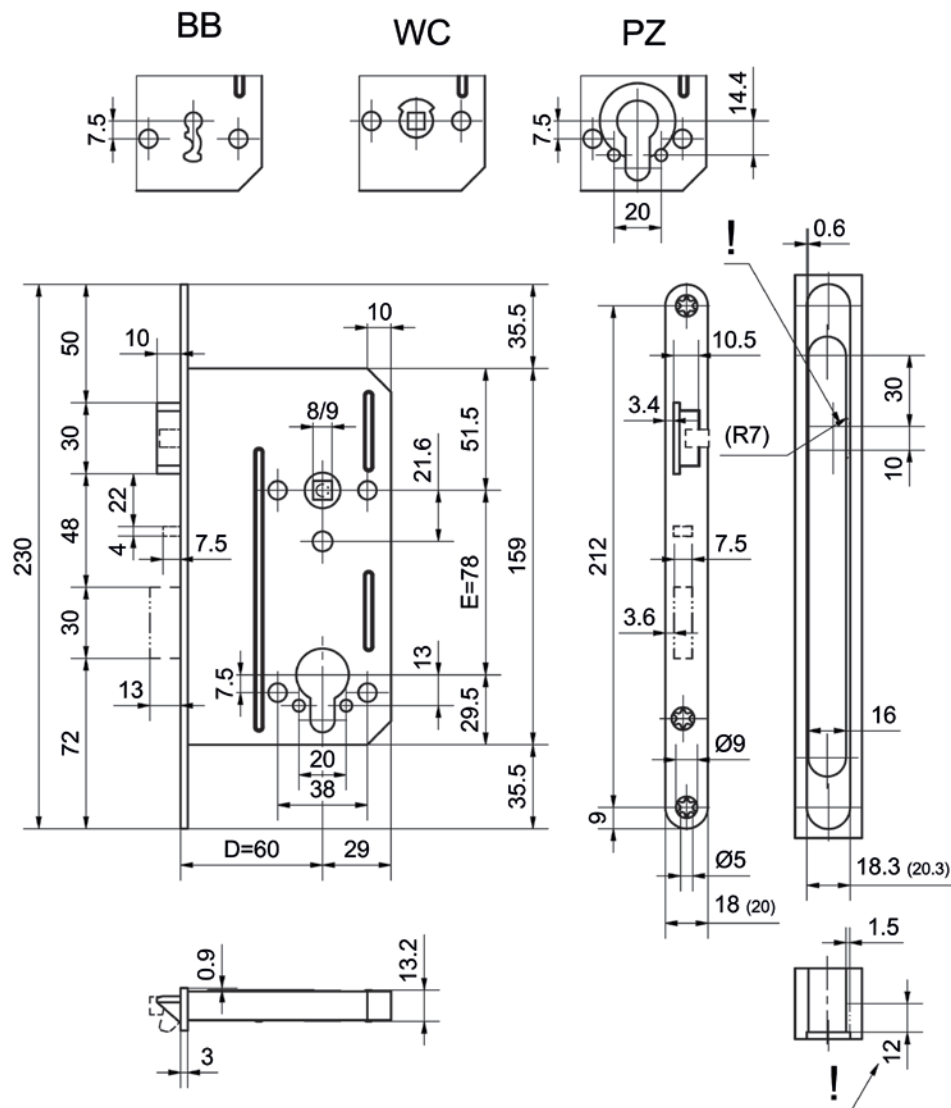

11xx / 12xx / 240xx - schweres Einsteckschloss CH
Massbild alle Ausführungen