
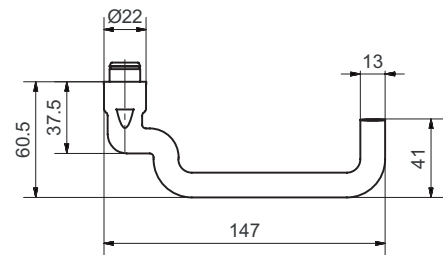


50041 Mercury

Stainless steel lever handle



Picture shows handle with 5618C rose

Product profile

Commercial buildings, administrative centres and superior quality residential developments

Standard version

Lever handle Length: 147 mm, Ø 22 mm

Projection: 61 mm

Square spindle 9 mm

Solid satin stainless steel

16 mm guide for Glutz glide / easyfix

for spring retention with shield 5219X

Options

Polished stainless steel

RAL lacquered

PVD lacquered

Square spindle 8 mm or 8,5 mm

16 mm guide for Glutz twin glide

Category of use class 3, EN 1906: 2002-05

For spring retention with plate 5219X

Standards

Category of use class 4, EN 1906: 2002-05

Tested for use in fire-rated and smoke protection doors to

DIN 18273: 1997 - 12

Admitted, combined with the appropriate lock as lever handle for emergency exits as per EN 179: 2002-06

50041 · ① · ② · ③ · ④ · ⑤ · ⑥

① 1021_Ausführung	② Guide	③ 1020_Vierkant	④ 1022_Stiftlänge	⑤ 1312_Material Vierkant	⑥ Surface
00 Lochteil	0 glide	80 8 mm	00 00	0 ohne Vierkant	00 Stainless steel matt
10 Stiftteil	1 twin	85 8,5 mm	06 84 mm	1 Stahl verzinkt	11 Stainless steel polished
50 Paar		90 9 mm	99 Auf Anfrage	2 Edelstahl	44 Antibacterial
					51 RAL 9005 black matt
					99 On request