


6143C left or right

Stainless steel metal frame rose with spring loaded

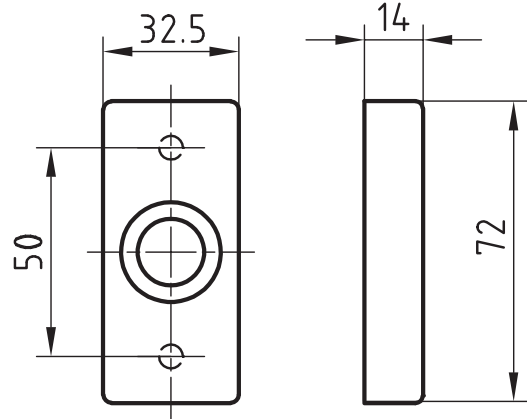

Standard version

Length: 72 mm
Width: 32,5 mm
Projection: 14 mm
Satin stainless steel
16 mm guide: Glutz glide inwards
Fixing centres 50 mm
Spring loaded left or right
For square spindle 8 mm

Options

Polished stainless steel
RAL lacquered
PVD lacquered
16 mm twin, semi-outside
Glutz easyfix
Knob fixing
For square spindle 8,5 or 9 mm

6143C · ① · ② · ③ · ④

① Execution	② Guide	③ Mounting fixe FEHO	④ Surface
6 Stück	0 glide 5 glide > Ø22 mm	2 easyfix FEHO 8 mm 3 easyfix FEHO 8,5 mm 4 easyfix FEHO 9 mm	00 Stainless steel matt 11 Stainless steel polished 44 Antibacterial 51 RAL 9005 black matt 99 On request