


5430 | 5432 | 5433 | 5434

Stainless steel security plate ES 1 - RZ

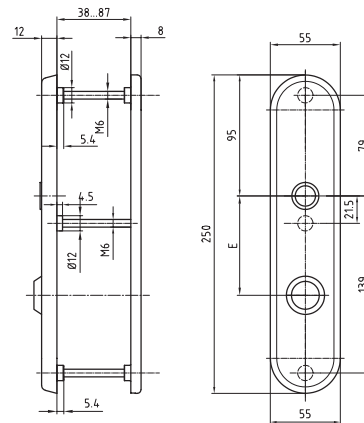

Product profile

For burglar resistant doors RC 1+2 according to

EN 1627 - 1630: 2011

Important note: When used in WK2 doors, a drill-protected cylinder must be fitted.

Standard version

Satin stainless steel

16 mm guide for Glutz glide

Outer plate 250 x 55 x 12 mm

Perforated for round cylinder 22 mm

Without RZ protection rose

5433.2S for door handle operation

5434.2S for knob Fixing

Outer plate 250 x 55 x 12 mm

Prepared for RZ protection rose

5430.2S-RS for door handle operation

5432.2S-RS for knob Fixing

Inside plate 5435.2C 250 x 55 x 8 mm

Inside plate 5436.2C conic 12 mm for SEAvision

Inside plate 5437.2C conic 18 mm for SEAvision Powerpack or

KABA-Elostar

Inner combi plate 5426.2C 12 mm for SEAvision

Inner combi plate 5427.2C 18 mm for SEAvision Powerpack or

KABA Elostar

Round cylinder protection roses stainless steel

5431/1: cylinder Projection: 6 - 10 mm

5431/2: cylinder Projection: 10 - 14 mm

5431/3: cylinder Projection: 14 - 18 mm

5431/4: cylinder Projection: 18 - 22 mm

5431/5: cylinder Projection: 22 - 26 mm

Centres

RZ: 74 mm, 78 mm, 94 mm

Options

Polished stainless steel; RAL lacquered; PVD lacquered

16 mm twin, semi-outside

Glutz easyfix

Standards

ES1-L-ZA, DIN 18257: 2003-03

Resistance class 2, EN 1906: 2002-05