
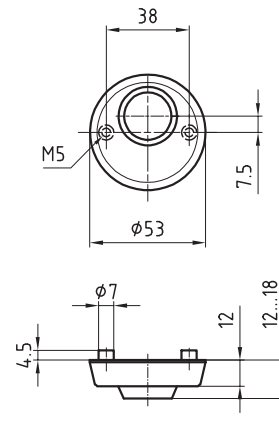


5330.2S-RS/5330.2C

Stainless steel cylinder protection rose ES 1



Product profile

For burglar resistant doors RC 1+2 according to
EN 1627 - 1630: 2011

Standard version

Outside rose 5330.2S-RS:
Solid satin stainless steel
Ø 53 mm
Projection: 12 mm
With threaded cam M5
Prepared for RZ protection rose
Inside rose to clip 5330.2C:
Satin stainless steel
Ø 53 mm
Projection: 8 mm
With guided cam M5
Fixing centres 38 mm

Options

Polished stainless steel
RAL lacquered
PVD lacquered
Round cylinder protection roses stainless steel
5330/1: cylinder Projection: 7 - 12 mm
5330/2: cylinder Projection: 12 - 15 mm
5330/3: cylinder Projection: 15 - 18 mm
5330/4: cylinder Projection: 18 - 21 mm

Standards

ES1-R, DIN 18257: 2003-03
Resistance class 2, EN 1906: 2002-05