


5630S

Stainless steel rose 12 mm

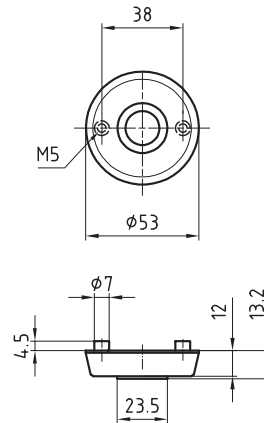

Standard version

Outside rose 5630S
Solid satin stainless steel
Ø 53 mm
Projection: 12 mm
With threaded cams M5
16 mm guide: Glutz glide inwards
Inside rose to clip 5630C
Satin stainless steel
Ø 53 mm
Projection: 8 mm
With guided cam M5
Fixing centres 38 mm

Options

Polished stainless steel
RAL lacquered
PVD lacquered
16 mm twin, semi-outside
Glutz easyfix
Knob fixing

5630S · ① · ② · ③ · ④ · ⑤

① Execution	② Guide	③ Mounting fixe FEHO	④ 1337_Lochung Haube	⑤ Surface
1 Pair	0 glide	0 ohne	19 für 18 mm Drücker	00 Stainless steel matt
2 Piece thread cams	2 Buttonhole	1 easyfix	21 für 20 mm Drücker	11 Stainless steel polished
3 Piece guidance cams	9 blind		23 für 22 mm Drücker	44 Antibacterial
			26 für Drücker Ø> 22 mm	51 RAL 9005 black matt
				99 On request