


## 50080 Assoluto

Stainless steel metal frame lever handle

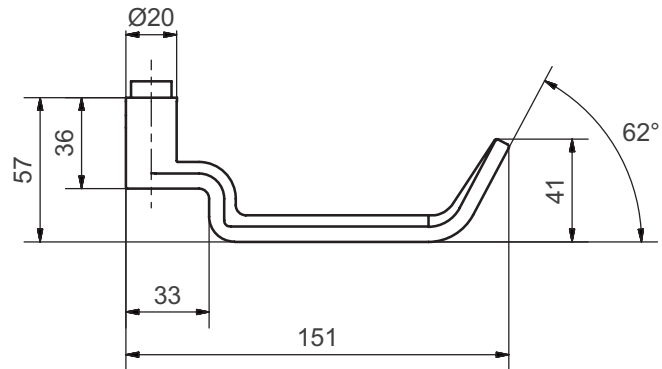

### Standard version

Lever handle Length: 151 mm, Ø 20 mm

Projection: 57 mm

Square spindle 8 mm

Satin stainless steel

16 mm guide for Glutz glide / easyfix

### Options

Polished stainless steel

RAL lacquered

PVD lacquered

Square spindle 8,5 mm or 9 mm

16 mm guide for Glutz twin glide

Category of use class 4, EN 1906: 2002-05

### Standards

Category of use class 3, EN 1906: 2002-05

Tested for use in fire-rated and smoke protection doors to DIN 18273: 1997 - 12

### 50080 · ① · ② · ③ · ④ · ⑤ · ⑥

① Execution	② Guide	③ Spindle	④ Spindle length	⑤ Spindle material	⑥ Surface
00 Female half-set	0 glide	80 8 mm	00 Without	0 Without	00 Stainless steel matt
	1 twin glide	85 8,5 mm	08 89 mm	1 Galvanized steel	11 Stainless steel polished
		90 9 mm	99 On request	2 Stainless steel	44 Antibacterial
					51 RAL 9005 black matt
					99 On request