


80410 Ligature resistant e-fitting

Public

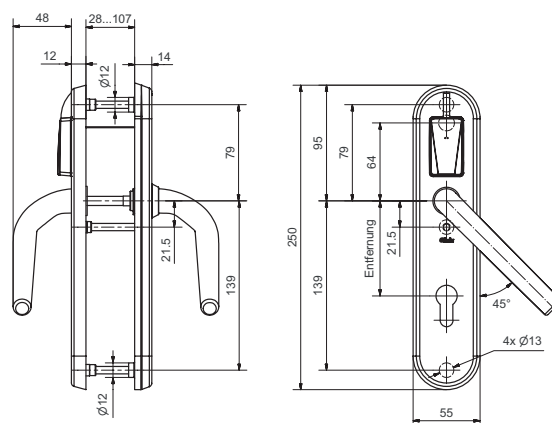

Product profile

Personal zones which are safety-critical are encountered mainly in forensic and psychiatric clinics. Detention establishments, police customs and court buildings. Those premises require maximum safety to protect patients and criminals. The special fitting design provides no surfaces which might be gripped for strangulation. All other functions identical to public e-fittings.

Standard version

DIN left and right with changeover facility
 Identification via RFID Mifare and radio 868 MHz
 Outside handle coupled, handle blocked
 External plate satin stainless steel
 Surface mounted 250 x 55 x 12 mm
 Cylinder protection rosette RZ/PZ
 Interior plate satin stainless steel
 Base plate in steel with screwed one electronic board and locking mechanism, with battery retainer
 Surface mounted 250 x 55 x 14 mm
 Guide 16 mm glide, easyfix
 Lever handles with split spindle (2 x female parts), outside lever handle with guide 8, 8.5 or 9 mm, inside lever handle always with guide 9 mm.

Cutout

Blind

RZ: 74 mm, 78 mm, 90 mm, 94 mm

PC: 70 mm, 72 mm, 78 mm, 85 mm, 88 mm, 90 mm, 92 mm

PRZ: 74 mm, 78 mm, 90 mm, 94 mm

Options

Lever handle design: 6051

Pins: 8 mm, 8.5 mm, 9 mm

Polished stainless steel

Stainless steel satin brass look

Stainless steel polished brass look

Matching screws and pins for door thicknesses: 28 - 107 mm