

1105KF

Heavy duty mortice lock with anti-friction lever latch (KF)



EN 1634

Product profile

For commercial buildings, offices, schools, hospitals and upmarket housing

Standard version

BB/WC

With latch withdrawal: profile or round cylinder

Distance 78 mm

Backset 60 mm

Clamp follower 8 mm

WC follower 7 mm

Forend 18 x 230 mm

Satin stainless steel forend radiussed

Lock case blue galvanised

Antifriction lever latch, crank in plastic material

Latch damper

Single throw steel dead bolt, 13 mm




1105KF · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

① Cutout	② Centres	③ Backset	④ Follower	⑤ Forend	⑥ Direction	⑦ Surface	⑧ Options
01 BB	78 78 mm	60 60 mm	8 8 mm	10 18r x 230 mm	0 DIN L [O]	00 Stainless steel matt	0000 No options
06 RZW		70 70 mm	9 9 mm	11 20r x 230 mm	1 DIN R [O]	11 Stainless steel polished	0025 PRIM system
07 PZW		80 80 mm		18 20e x 230 mm		22 PVD brass polished	0040 Snib of a latch
47 WC 7 mm				19 18e x 230 mm		99 On request	0050 Double turn deadbolt

1105KF

Heavy duty mortice lock with anti-friction lever latch (KF)

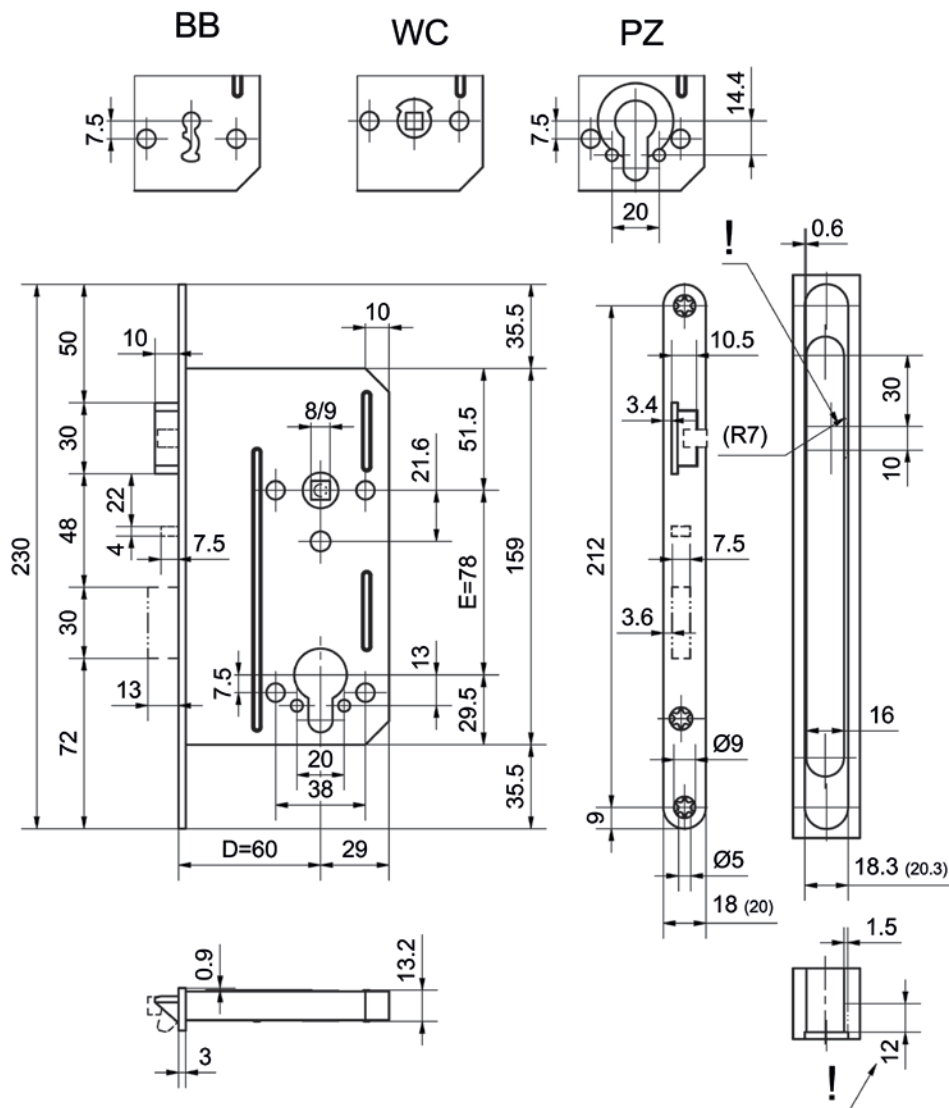

11xx / 12xx / 240xx - schweres Einsteckschloss CH
Massbild alle Ausführungen