

1106

Heavy duty mortice lock with low friction latch Delrin



Product profile

For commercial and public buildings, schools, hospitals and upmarket housing

Standard version

BB/WC

With latch withdrawal: profile or round cylinder

Distance 78 mm

Backset 60 mm

Clamp follower 8 mm

WC follower 7 mm

Forend radiussed, 18 x 230 mm, satin stainless steel

Lock case blue galvanised

Delrin latch

Latch damper

Single throw steel dead bolt, 13 mm



Package

single packaging

industrial packaging, 50 pces (left or right)


carpenter packaging, 50 pces (25 left / 25 right)

1106 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8

1 Cutout	2 Centres	3 Backset	4 Follower	5 Forend	6 Direction	7 Surface	8 Options
01 BB	78 78 mm	60 60 mm	8 8 mm	10 18r x 230 mm	0 DIN L [O]	00 Stainless steel matt	0000 No options
06 RZW		70 70 mm	9 9 mm	11 20r x 230 mm	1 DIN R [O]	11 Stainless steel polished	0025 PRIM system
07 PZW		80 80 mm		18 20e x 230 mm		22 PVD brass polished	0040 Snib of a latch
47 WC 7 mm				19 18e x 230 mm		99 On request	0050 Double turn deadbolt

1106

Heavy duty mortice lock with low friction latch Delrin

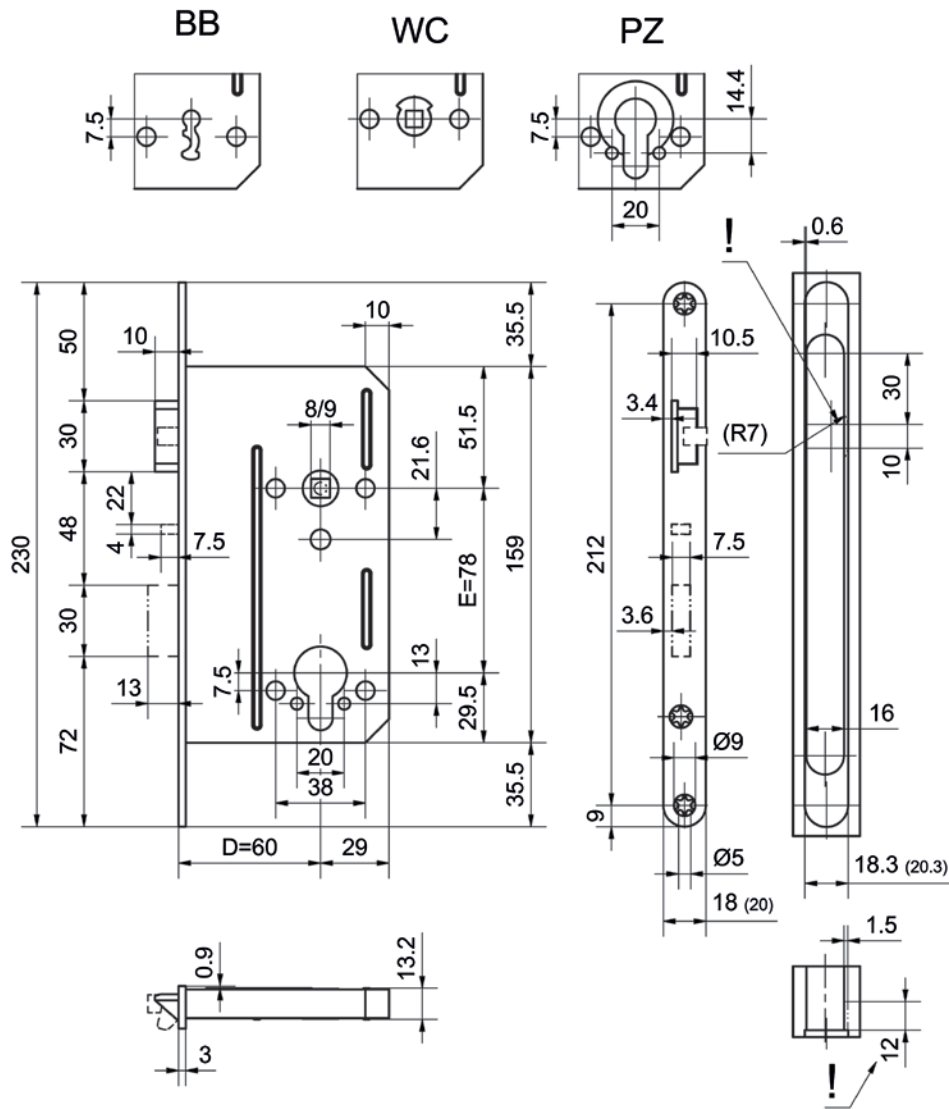

11xx / 12xx / 240xx - schweres Einsteckschloss CH
Massbild alle Ausführungen