


80530 E Organisation Fitting

Public, wide - steel - with round interior rose

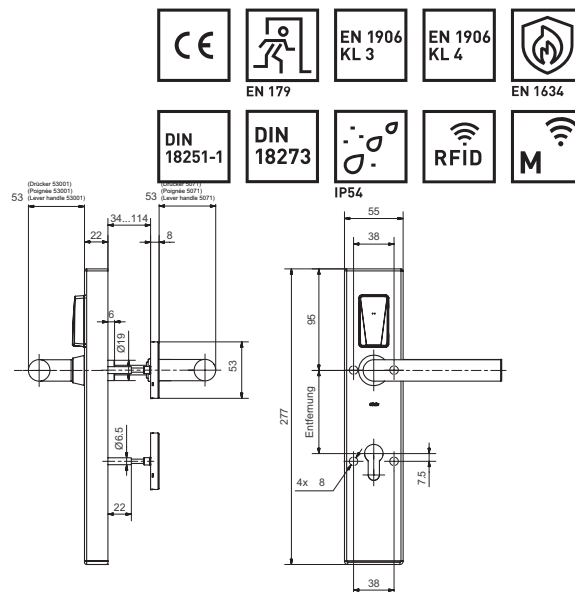

Product profile

Battery-operated electronic organisation fitting for solid-leaf interior doors in residential buildings, offices and public areas. Opening and closing from outside take place with contact reading of the RFID-medium. Door opening is always assured with the interior lever handle; EN179-compliant with suitable lever handle.

Standard version

- For DIN left-hand/right-hand doors
- Identification via RFID Mifare DESfire EV 1 (ISO 14443A)
- Programming via media or wireless access (868 MHz)
- External lever handle engaged, freewheeling

Scope of supply

- E-fitting incl. interior rose
- Lever handle pair
- Battery pack
- Square spindle and screw set
- Quick guide

80530 • 1 • 2 • 3 • 4 • 5 • 6 • 7 • 8 • 9

1 Power supply	2 Cut-out outs. 3 Cut-out ins.	4 Dis- tance	5 Lever handle design	6 Square spindle	7 Surface	8 Door thickness	9 Protection rose
00 Lithium Battery	0 Blind 2 RZ 3 PZ 4 PRZ	00 Blind 55 55 mm 70 70 mm 72 72 mm 74 74 mm 78 78 mm 85 85 mm 88 88 mm 90 90 mm 92 92 mm 94 94 mm	21 53001 (5071) Memphis 22 53002 (5066) Savannah 23 53004 (5064) Oslo 24 53010 (5057) Thun 25 53011 (5062) New Orleans 26 53013 (5098) Olten 31 53003 (5059) Oslo angled 32 53012 (5072) Memphis angled 33 53009 (5066) Savannah angled 34 50935 (5038) Lugano 35 50937 (5040) Merkur 36 50936 (5038V) Lugano angled 37 50938 (50040) Merkur 39 50939 (50042) Merkur angled 40 50970 (50070) Appenzell 41 50971 (50071) Appenzell 99 Spec. execution	8 8 mm 5 8,5 mm 9 9 mm	00 Satin stainless steel 11 Polished stain. steel 22 Polished brass 33 Satin brass 44 Anti-bacterial 51 RAL 9005 black matt 55 Wrought iron look 99 Spec. execution	01 34 to 43 mm 02 44 to 53 mm 03 54 to 63 mm 04 64 to 73 mm 05 74 to 83 mm 06 84 to 93 mm 07 94 to 103 mm 08 104 to 113 mm	00 None/Blind

RZ: 74, 78, 90, 94 mm; PZ: 55, 70, 72, 78, 85, 88, 90, 92 mm; PRZ: 74, 78, 90, 94 mm