


5039 Lucerne

Stainless steel lever handle

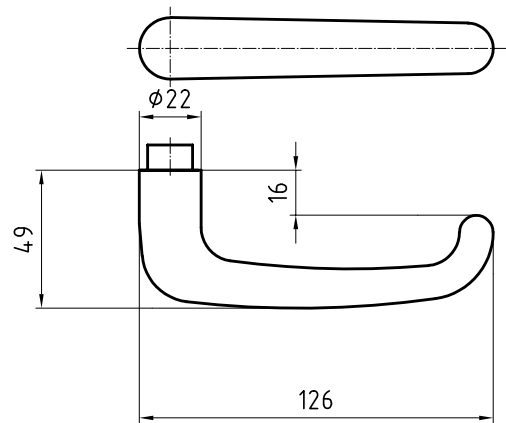

Picture shows handle with 5620C rose

Product profile

Commercial buildings, administrative centres and superior quality residential developments

Standard version

Satin stainless steel surface
Lever handle length 126 mm, Ø 22 mm
Projection 49 mm
Prepared for fixed mobile mounting with easyfix
Steel galvanised square spindle
16-mm Glutz glide bearing, tested for 2.5 million cycles

Options

16-mm twin bearing with easyfix (fixed mobile)

Important note

To achieve usage class 4 in accordance with EN 1906, a 9-mm steel or 8-mm stainless steel square spindle is needed

5039 · ① · ② · ③ · ④ · ⑤ · ⑥

① 1021_Ausführung	② Guide	③ 1020_Vierkant	④ 1022_Stiftlänge	⑤ 1312_Material Vierkant	⑥ Surface
00 Lochteil	0 glide	80 8 mm	00 00	0 ohne Vierkant	00 Stainless steel matt
10 Stiftteil	1 twin glide	85 8,5 mm	04 79 mm	1 Stahl verzinkt	11 Stainless steel polished
50 Paar		90 9 mm	10 104 mm	2 Edelstahl	44 Antibacterial
			99 Auf Anfrage		51 RAL 9005 black matt
					99 On request