

1107

Heavy duty mortice lock with anti-thrust latch



EN 1634

Product profile

For public buildings, office buildings, banks, hospitals. For rooms with increased security requirements, we recommend the double throw option. Also suitable for non-rebated doors due to latch blocking. Use in conjunction with mechatronic eAccess fitting (lever handle – lever handle). Lock must not be used in conjunction with an electric opener

Standard version

Round or profile cylinder with latch withdrawal
Distance 78 mm
Backset 60 mm
Clamp follower 8 mm
Forend radiussed 18 x 230 mm, matt stainless steel
Steel latch
Latch damper
Single throw steel dead bolt, 13 mm
Hardened double throw steel deadbolt, 25 mm
Latch blocking with wide control bolt
Control bolt is retracted with lock latch

Package

single packaging
industrial packaging, 50 pces (left or right)
carpenter packaging, 50 pces (25 left / 25 right)




1107 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

① Cutout	② Centres	③ Backset	④ Follower	⑤ Forend	⑥ Direction	⑦ Surface	⑧ Options
06 RZW	78 78 mm	60 60 mm	8 8 mm	10 18 x 230 mm	0 DIN L [O]	00 Stainless steel matt	0000 No options
07 PZW		70 70 mm	9 9 mm		1 DIN R [O]	99 On request	0050 Double turn deadbolt
		80 80 mm					

1107

Heavy duty mortice lock with anti-thrust latch

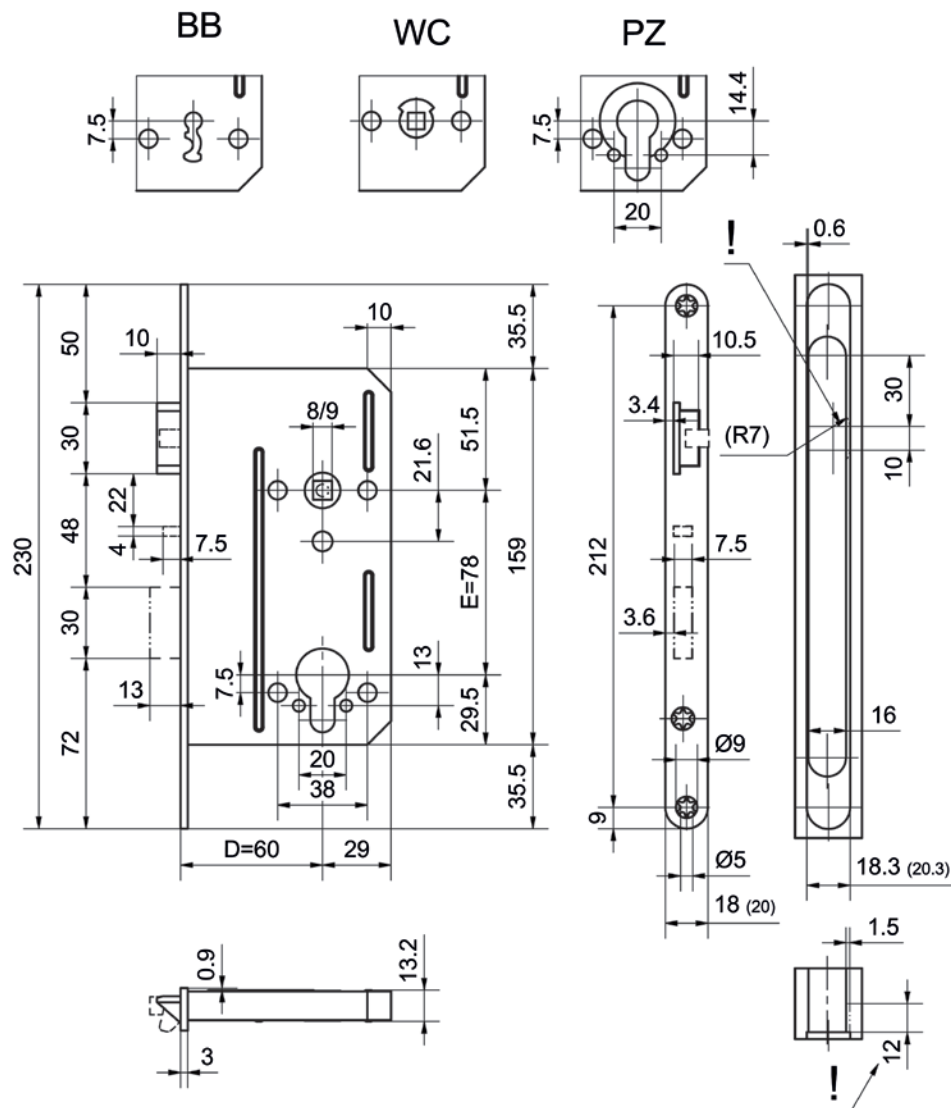

11xx / 12xx / 240xx - schweres Einsteckschloss CH
Massbild alle Ausführungen