


5059 Oslo

Stainless steel metal frame lever handle

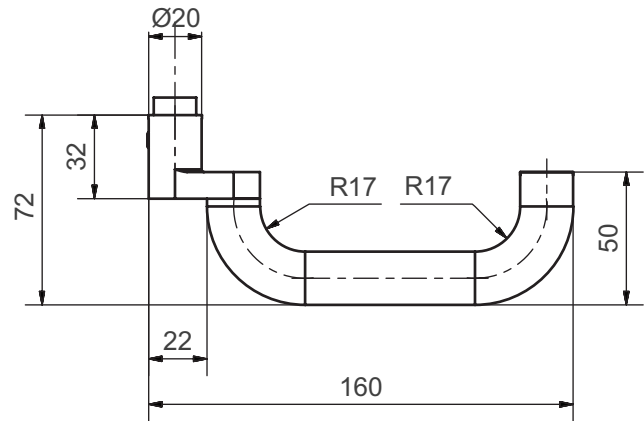

Picture shows handle with 5618C rose

Standard version

Lever handle Length: 160 mm, Ø 20 mm

Projection: 72 mm

Square spindle 8 mm

Satin stainless steel

16 mm guide for Glutz glide / easyfix

Options

Polished stainless steel

RAL lacquered

PVD lacquered

Square spindle 8,5 mm or 9 mm

16 mm guide for Glutz twin glide

Category of use class 4, EN 1906: 2002-05

For spring retention with plate 5219X

Standards

Category of use class 3, EN 1906: 2002-05

Tested for use in fire-rated and smoke protection doors to

DIN 18273: 1997 - 12

Admitted, combined with the appropriate lock as lever handle for emergency exits as per EN 179: 2002-06

5059 • 1 • 2 • 3 • 4 • 5 • 6

1 1021_Ausführung	2 Guide	3 1020_Vierkant	4 1022_Stiftlänge	5 1312_Material Vierkant	6 Surface
00 Lochteil	0 glide	80 8 mm	00 00	0 ohne Vierkant	00 Stainless steel matt
10 Stiftteil	1 twin	85 8,5 mm	01 72 mm	1 Stahl verzinkt	11 Stainless steel polished
50 Paar		90 9 mm	08 89 mm	2 Edelstahl	44 Antibacterial
			99 Auf Anfrage		51 RAL 9005 black matt
					99 On request