

1204

Heavy duty mortice lock for 2 different keying systems



Product profile

For Commercial buildings, large housing units and buildings with access for public works.

Standard version

Latch withdrawal
Lock case blue galvanised
Steel latch
Single turn deadbolt in steel, 10 mm

Options

With panic-function E, non-split follower 9 mm

Standards

EN 179 (only for version with panic-function), EN 12209, EN 1634-2

Important note

On mortice locks for panic / emergency exit doors, cylinder with door knob must not be installed, and key must not be left in lock.

On panic version with backset 30 mm, the lockcase thickness is 15.5 mm.




1204 · ① · ② · ③ · ④ · ⑤ · ⑥ · ⑦ · ⑧

① Cutout	② Centres	③ Backset	④ Follower	⑤ Forend	⑥ Direction	⑦ Surface	⑧ Options
66 RZIRZ 67 RZIPZ 77 PZIPZ	60 60/108 mm	30 30 mm 60 60 mm	8 8 mm 9 9 mm	22 18e x 270 mm	0 DIN L [O] 1 DIN R [O]	00 Stainless steel matt 99 On request	0000 No options 0025 PRIM system 0026 With panic-funktion E (follower 9 mm)

1204

Heavy duty mortice lock for 2 different keying systems

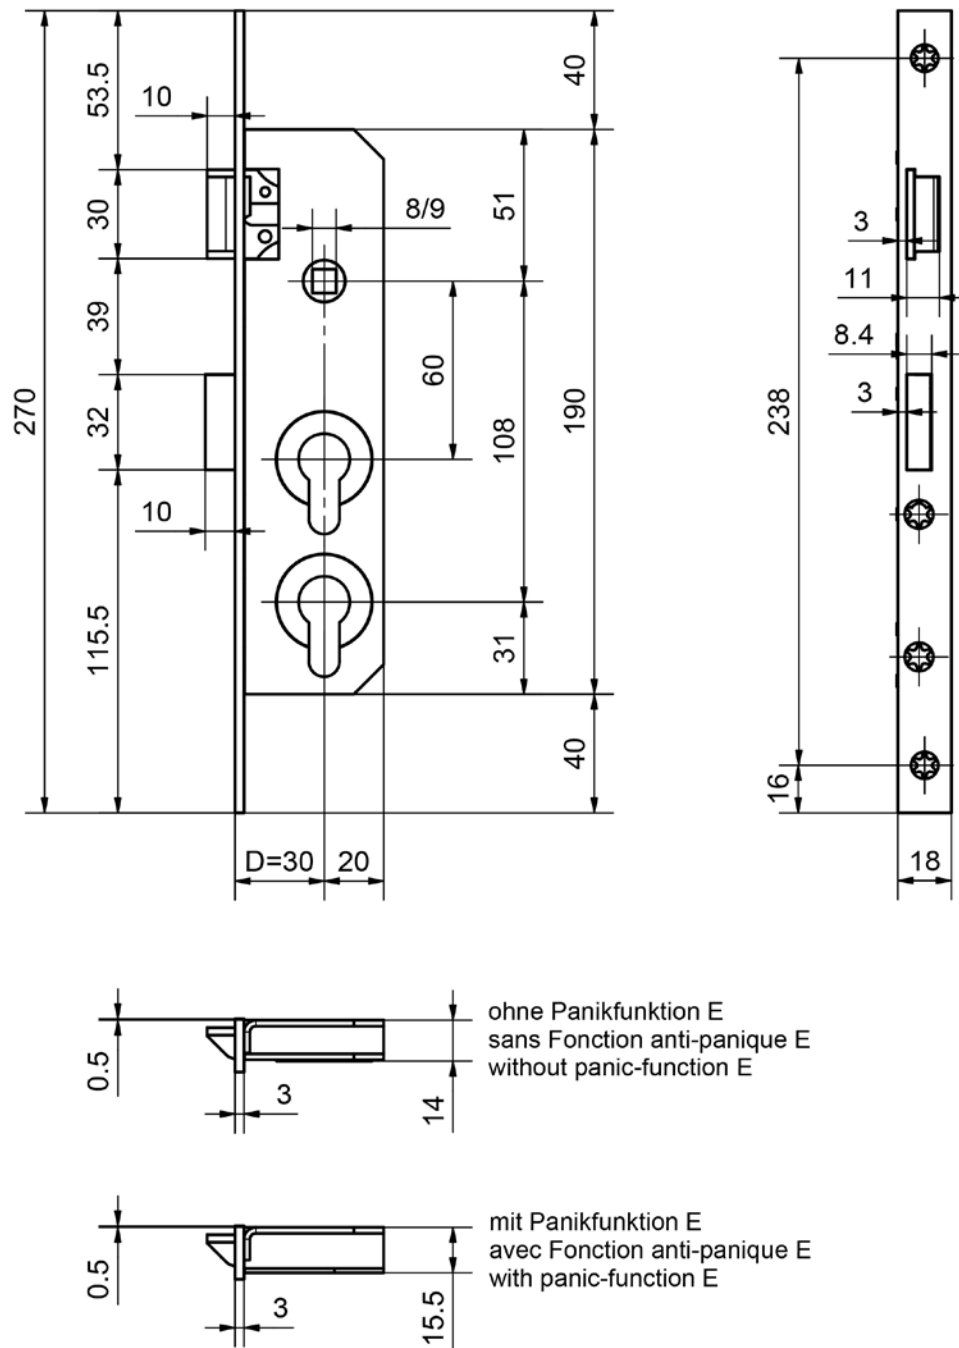

1204 - Schweres Einsteckschloss
Massbild DM30 mit/ohne Panik